## LORO-DJ ABL.EDELST.KLEMMFL.2-TLG.M.WD.

**LORO-DRAINJET drain stainless steel clamping flange two-piece with insulation with large cover DN 150**

### Descrição

LORO-X DRAINLET flat roof siphonic drain, series 49(DJ), high performance two-piece, with thermal insulation, vertical outlet, for main drainage with siphonic flow, discharge rate 50.0 l/s at 55 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINJET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX960, made of stainless steel, DN150

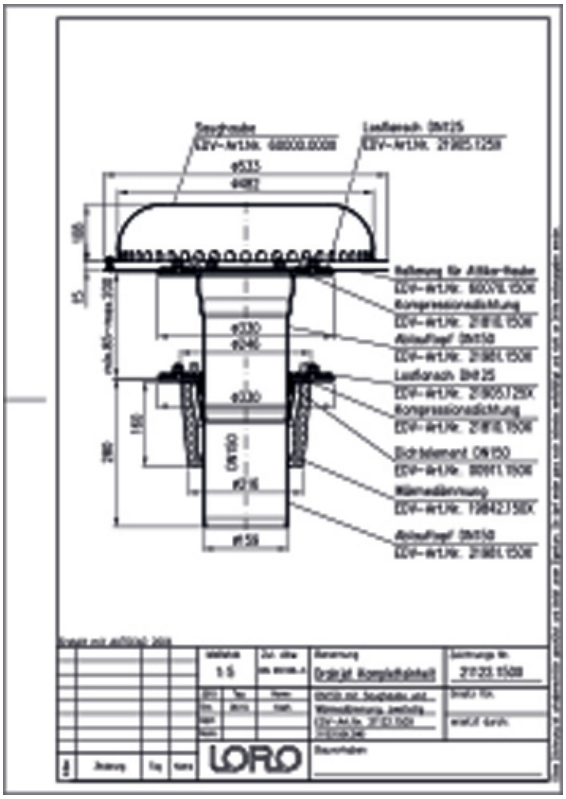

### Dados do artigo

| | |
|---|---|
| Código EAN | 4038088090695 |
| Classe ETIM | EC011398 |
| Diâmetro nominal | DN 150 |
| Medidas exteriores (AxLxP) | 533 x 533 x 493 mm |
| Peso | 18,00 Kg (STK) |
| Grupo de produtos | 4 |
| Número de pauta aduaneira | 73072980 |
| Material / Cor | Edelstahl, Silber |

### Nota de utilização

Große Dachflächen können durch leistungsstarke Systeme mit Druckströmung wirtschaftlich und sicher entwässert werden. LORO-X Schnellablaufsysteme mit Druckströmung werden durch die höhere Strömungsgeschwindigkeit mit kleineren Rohrdurchmessern bei gleichzeitig höherer Abflussleistung betrieben. Die hohe Strömungsgeschwindigkeit im Rohr erhöht darüber hinaus den Selbstreinigungseffekt. Einsatzgebiete Industriedächer, Gewerbe, Warmdächer, Kaltdächer, Kastenrinnen, Tiefpunktlinien, Schnellablaufsysteme, große Dachflächen, Stadien, Lagerhallen, Logistikzentren.

### Transferências

Alles online

Instruções de instalação (PDF)
Homologação (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Desenho cotado (PDF)
Aufbauschema (PDF)
CAD 3D (DWG)
Brochura (PDF)
Ficha técnica do sistema LX 960
BIM 3D (STEP)