
LORO-DJ FLAT ROOF DRAIN SIPHONIC FLOW 2-PART. CLAMBING FLANGE, VERTICAL, WITH THERMAL INSULATION AND HEATING DN 100

LORO-DRAINJET drain in stainless steel with two-part clamping flange with heat insulation and heater DN 100

Tekst za troškovnik

LORO-X DRAINLET flat roof siphonic drain, series 49(DJ), two-piece, with thermal insulation and heating, vertical outlet, for main drainage with siphonic flow, discharge rate 27.0 l/s at 55 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINJET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX530, made of stainless steel, DN100



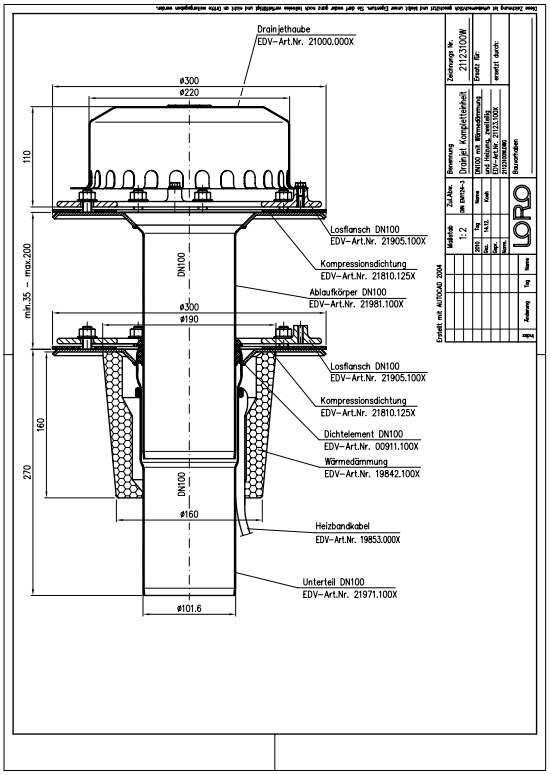

Podaci o artiklu

EAN kod	**4038088072554**
ETIM klasa	**EC011398**
Nazivni promjer	**DN 100**
Vanjske mjere (VxŠxD)	**300 x 300 x 4225 mm**
Težina	**6,50 Kg (STK)**
Grupa proizvoda	**4**
Carinski tarifni broj	**73072980**
Materijal / Boja	**Edelstahl, Silber**

Napomena za upotrebu

Große Dachflächen können durch leistungsstarke Systeme mit Druckströmung wirtschaftlich und sicher entwässert werden. LORO-X Schnellablaufsysteme mit Druckströmung werden durch die höhere Strömungsgeschwindigkeit mit kleineren Rohrdurchmessern bei gleichzeitig höherer Abflussleistung betrieben. Die hohe Strömungsgeschwindigkeit im Rohr erhöht darüber hinaus den Selbstreinigungseffekt. Einsatzgebiete Industriedächer, Gewerbe, Warmdächer, Kaltdächer, Kastenrinnen, Tiefpunktlinien, Schnellablaufsysteme, große Dachflächen, Stadien, Lagerhallen, Logistikzentren.

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Certifikat (PDF)
CAD 2D (DXF)
Dimenzijski crtež (PDF)
Aufbauschema (PDF)
CAD (DWG)
Prospekt (PDF)
Tehnički list sustava LX 530