Ficha técnica do produto

LORO_Produkt-Datenblatt_21323.100X_pt.pdf
Artigo 21323.100X
29.11.2026, 20:41


LORO-DJ EMERGENCY DRAIN SIPHONIC FLOW 2-PART. CLAMBING FLANGE, VERTICAL, WITH THERMAL INSULATION AND HEATING DN 100

LORO-DRAINJET emergency drain in stainless steel with clamping flange, two-part with heat insulation and heater DN 100

Texto para caderno de encargos

LORO-X DRAINLET flat roof siphonic drain, series 49(DJ), two-piece, with thermal insulation and heating, vertical outlet, for emergency drainage with siphonic flow, discharge rate 38.0 l/s at 75 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINJET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX542, made of stainless steel, DN100



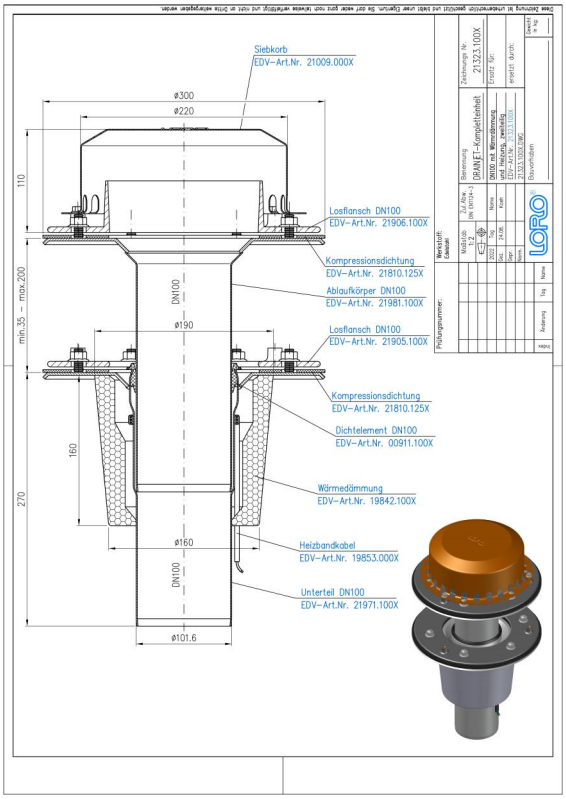

Dados do artigo

Código EAN	4038088072677
Classe ETIM	EC010827
Diâmetro nominal	DN 100
Medidas exteriores (AxLxP)	300 x 300 x 423 mm
Peso	8,10 Kg (STK)
Grupo de produtos	4
Número de pauta aduaneira	73072980
Material / Cor	Edelstahl, Silber

Nota de utilização

Große Dachflächen können durch leistungsstarke Systeme mit Druckströmung wirtschaftlich und sicher entwässert werden. LORO-X Schnellablaufsysteme mit Druckströmung werden durch die höhere Strömungsgeschwindigkeit mit kleineren Rohrdurchmessern bei gleichzeitig höherer Abflussleistung betrieben. Die hohe Strömungsgeschwindigkeit im Rohr erhöht darüber hinaus den Selbstreinigungseffekt. Einsatzgebiete Industriedächer, Gewerbe, Warmdächer, Kaltdächer, Kastenrinnen, Tiefpunktlinien, Schnellablaufsysteme, große Dachflächen, Stadien, Lagerhallen, Logistikzentren.

Transferências

Alles online

Instruções de instalação (PDF)
Homologação (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Desenho cotado (PDF)
Aufbauschema (PDF)
CAD 3D (DWG)
Brochura (PDF)
Ficha técnica do sistema LX 542
BIM 3D (STEP)