

LORO-DL SANIERUNGS ABL.EDELST.DN 80

LORO-DRAINLET stainless steel renovation drain DN 80

Описание

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN 80




Данни за артикула

ЕАН код	4038088075814
ЕТИМ клас	EC011398
Номинален диаметър	DN 80
Външни размери (ВxШxД)	300 x 300 x 300 mm
Тегло	4,30 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73072980
Материал / Цвят	Edelstahl, Silber

Забележка за употреба

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

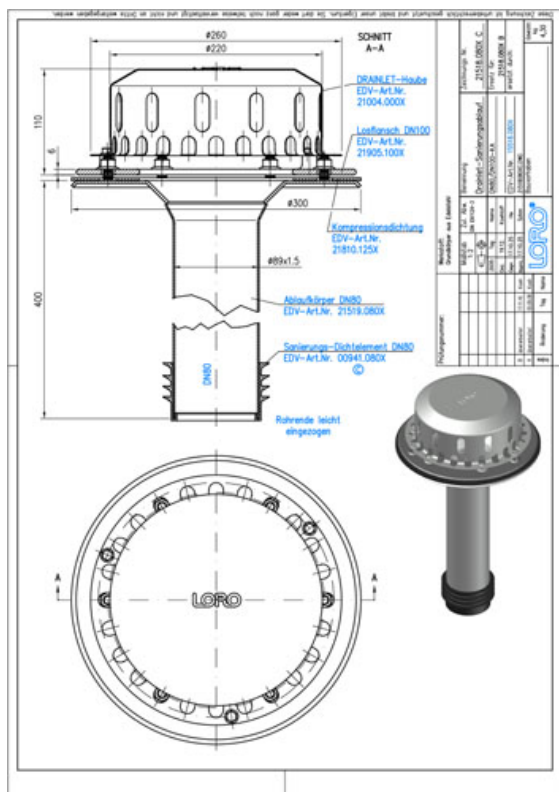

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD чертеж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Брошура \(PDF\)](#)

[CAD 3D \(DWG\)](#)