

LORO-DL SANIERUNGS ABL.EDELST.DN 80

LORO-DRAINLET stainless steel renovation drain DN 80

Opis

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN 80




Podatki o izdelku

EAN koda	4038088075814
ETIM razred	EC011398
Nazivni premer	DN 80
Zunanje mere (VxŠxD)	300 x 300 x 300 mm
Teža	4,30 Kg (STK)
Skupina izdelkov	4
Carinska tarifna številka	73072980
Material / Barva	Edelstahl, Silber

Opomba za uporabo

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

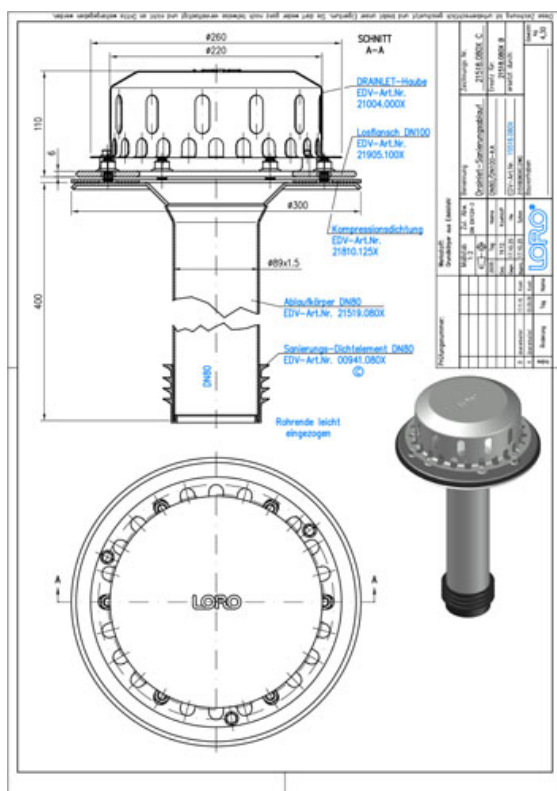

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Merska risba \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)