

LORO-DL SANIERUNGS ABL.EDELST.DN 80

LORO-DRAINLET stainless steel renovation drain DN 80

Popis

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN 80




Údaje o artiklu

EAN kód	4038088075814
ETIM třída	EC011398
Jmenovitý průměr	DN 80
Vnější rozměry (VxŠxD)	300 x 300 x 300 mm
Hmotnost	4,30 Kg (STK)
Skupina produktů	4
Celní sazebník	73072980
Materiál / Barva	Edelstahl, Silber

Pokyny k použití

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

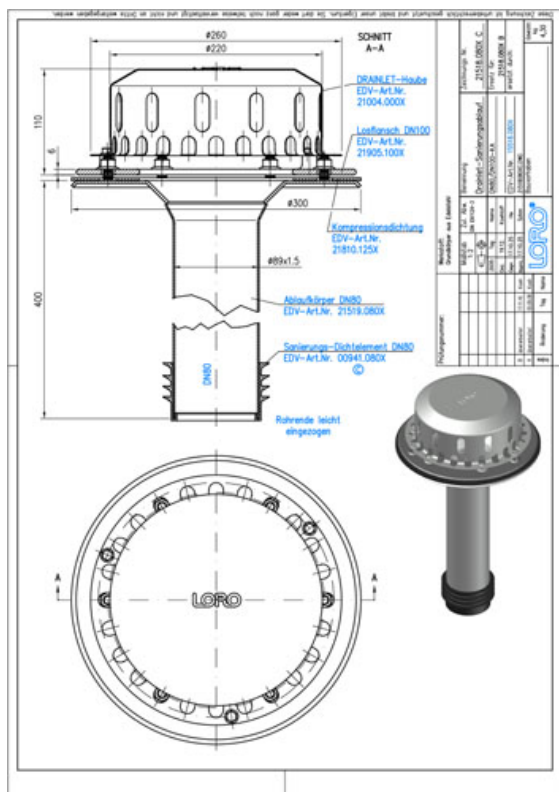

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)