

LORO-DL SANIERUNGS ABL.EDELST.DN 100

LORO-DRAINLET stainless steel renovation drain DN 100

Opis

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 6.5 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 118-130 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN100



Dane artykułu

Kod EAN 4038088090787

Klasa ETIM EC011398

Średnica nominalna DN 100

Wymiary zewnętrzne 300 x 300 x 516 mm (WxSxD)

Waga 5,50 Kg (STK)


Grupa produktów 4

Numer taryfy celnej 73072980

Materiał / Kolor Edelstahl, Silber

Wskazówki dotyczące użytkowania

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

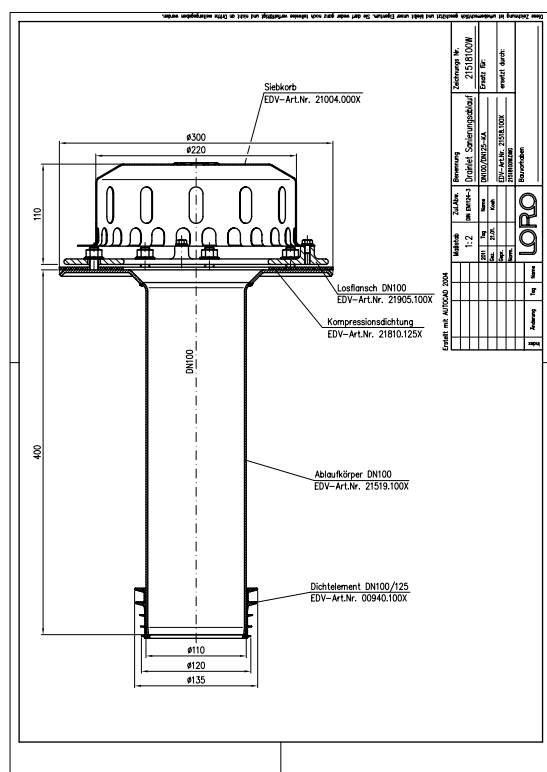

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Broszura \(PDF\)](#)

[CAD \(DWG\)](#)