LORO-DL SANIERUNGS ABL.EDELST.DN 100

LORO-DRAINLET stainless steel renovation drain DN 100

Description

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 6.5 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 118-130 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN100

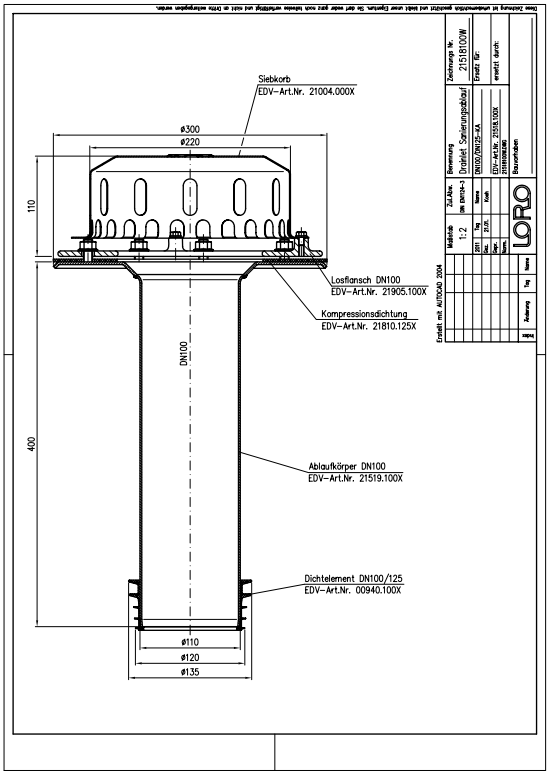

Données de l'article

Code EAN	4038088090787
Classe ETIM	EC011398
Diamètre nominal	DN 100
Dimensions extérieures (HxLxP)	300 x 300 x 516 mm
Poids	5,50 Kg (STK)
Groupe de produits	4
Numéro tarifaire douanier	73072980
Matériau / Couleur	Edelstahl, Silber

Note d'utilisation

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Téléchargements

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online