

## LORO-DL SANIERUNGS ABL.EDELST.DN 125

### LORO-DRAINLET stainless steel renovation drain DN 125

#### Descriere

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 9.8 l/s at 45 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 145-155 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN125




#### Date articol

|                                  |                    |
|----------------------------------|--------------------|
| Cod EAN                          | 4038088090794      |
| Clasă ETIM                       | EC011398           |
| Diametru nominal                 | DN 125             |
| Dimensiuni<br>exterioare (ÎxLxA) | 330 x 330 x 516 mm |
| Greutate                         | 5,50 Kg (STK)      |
| Grupă de produse                 | 4                  |
| Număr tarif vamal                | 73072980           |
| Material / Culoare               | Edelstahl, Silber  |

#### Notă de utilizare

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

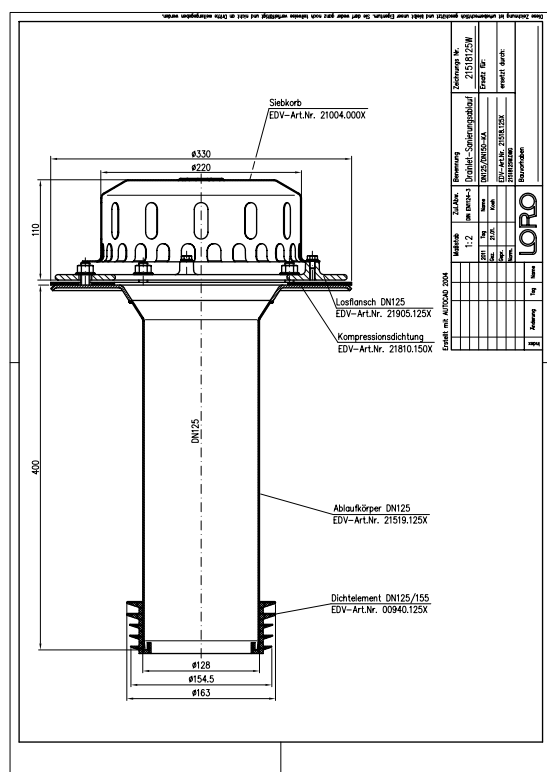

#### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[Desen CAD \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Broșură \(PDF\)](#)

[CAD \(DWG\)](#)