

LORO-DL SANIERUNGS ABL.EDELST.DN 125

LORO-DRAINLET stainless steel renovation drain DN 125

Opis

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 9.8 l/s at 45 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 145-155 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN125




Podatki o izdelku

EAN koda	4038088090794
ETIM razred	EC011398
Nazivni premer	DN 125
Zunanje mere (VxŠxD)	330 x 330 x 516 mm
Teža	5,50 Kg (STK)
Skupina izdelkov	4
Carinska tarifna številka	73072980
Material / Barva	Edelstahl, Silber

Opomba za uporabo

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

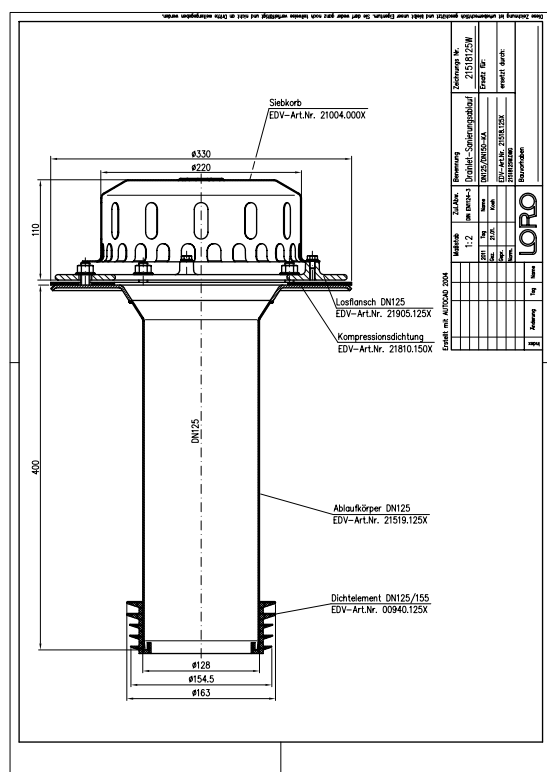

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[Merska risba \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)

[CAD \(DWG\)](#)