


LORO-DL SANIERUNGS ABL.EDELST.DN 125

LORO-DRAINLET stainless steel renovation drain DN 125

Beschrijving

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 9.8 l/s at 45 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 145-155 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN125

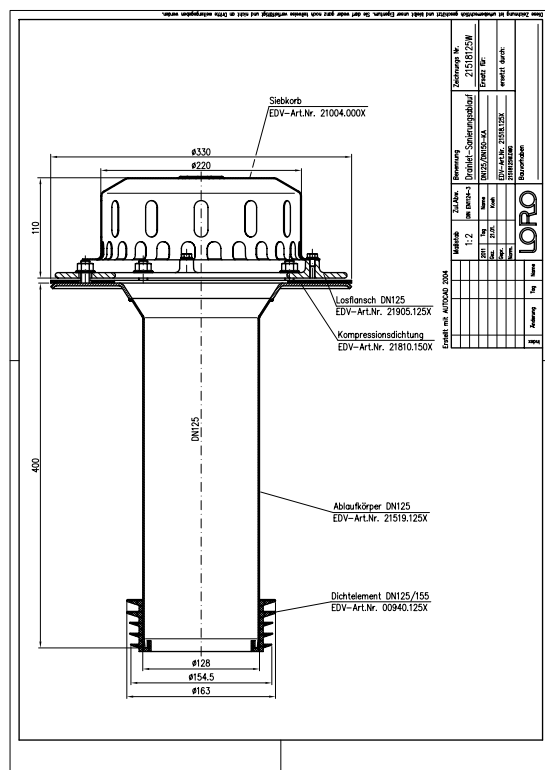

Artikelgegevens

EAN-code	4038088090794
ETIM Klasse	EC011398
Nominale diameter	DN 125
Buitenafmetingen (HxBxL)	330 x 330 x 516 mm
Gewicht	5,50 Kg (STK)
Productgroep	4
Douanetariefnummer	73072980
r	
Materiaal / Kleur	Edelstahl, Silber

Gebruiksaanwijzing

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)
[Certificaat \(PDF\)](#)
[Maattekening \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Brochure \(PDF\)](#)
[CAD \(DWG\)](#)