

LORO-DL SANIERUNGS ABL.EDELST.DN 125

LORO-DRAINLET stainless steel renovation drain DN 125

Opis

LORO-X DRAINLET flat roof renovation drain, series 84(DL), one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 9.8 l/s at 45 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, with transition sealing element for pipe inside diameter 145-155 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of stainless steel, DN125



Dane artykułu

Kod EAN 4038088090794

Klasa ETIM EC011398

Średnica nominalna DN 125

Wymiary zewnętrzne 330 x 330 x 516 mm (WxSxD)

Waga 5,50 Kg (STK)


Grupa produktów 4

Numer taryfy celnej 73072980

Materiał / Kolor Edelstahl, Silber

Wskazówki dotyczące użytkowania

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

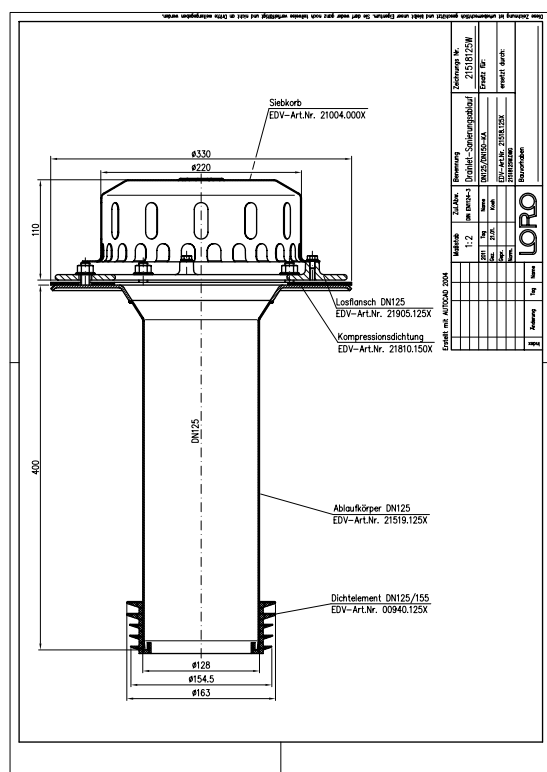

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Broszura \(PDF\)](#)

[CAD \(DWG\)](#)