
LORO-DL FLAT ROOF DRAIN MAIN-GRAVITY FLOW 2-PART. CLAMBING FLANGE, VERTICAL WITH THERMAL INSULATION AND HEATING DN 50

LORO-DRAINLET Drain stainless steel clamp flange vertical two-piece with heat insulation and heating DN 50

Tekst za troškovnik

LORO-X DRAINLET flat roof drain, series 84(DL), two-piece, with thermal insulation and heating, vertical outlet, for main drainage with gravity flow, discharge rate 5.4 l/s at 35 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX1384, made of stainless steel, DN50



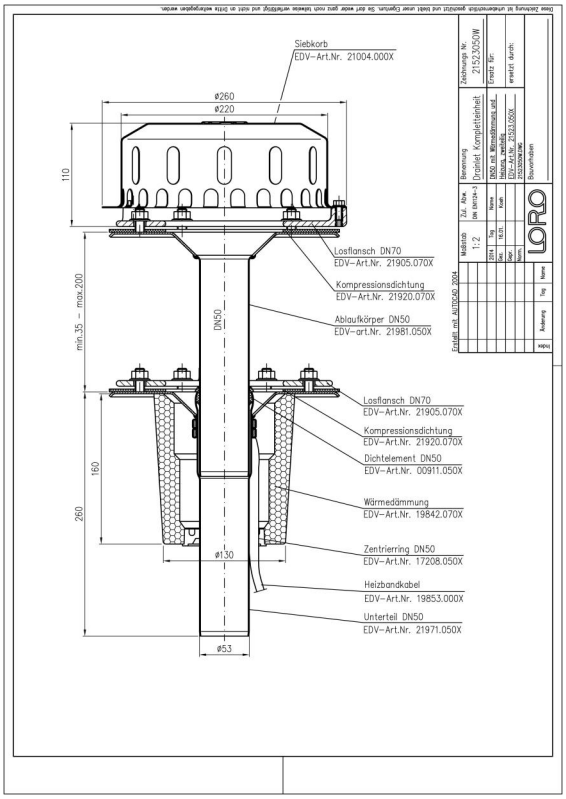

Podaci o artiklu

EAN kod	**4038088094860**
ETIM klasa	**EC011398**
Nazivni promjer	**DN 50**
Vanjske mjere (VxŠxD)	**260 x 260 x 413 mm**
Težina	**3,80 Kg (STK)**
Grupa proizvoda	**4**
Carinski tarifni broj	**73072980**
Materijal / Boja	**Edelstahl, Silber**

Napomena za upotrebu

Platzsparende Maße ohne „Topf“ in der Dachfläche und ein hoher Abfluss durch die leistungsstarke LORO-X Haube mit Belüftungsöffnungen zeichnen die LORO-X DRAINLET® Hauptentwässerung und Notentwässerung mit Freispiegelströmung aus. Klemmflansch für Bitumen und Kunststoff. Der Klemmflansch als Los- und Festflanschkonstruktion ist für Abdichtungsbahnen (Ablauf) und Dampfsperren (2-teilig) aus Bitumen und Kunststoff gleichermaßen geeignet. Einsatzgebiete: Flachdächer, Warmdächer, Kaltdächer, befahrbare Dachflächen, Umkehrdächer, Gründächer, Abdichtungsbahnen aus Bitumen und Kunststoff, Trapezblechdächer, Kastenrinnen.

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Certifikat (PDF)
Tehnički list sustava LX 2292
BIM Revit (RFA)
Dimenzijski crtež (PDF)
Aufbauschema (PDF)
CAD 2D (DXF)
Prospekt (PDF)
Tehnički list sustava LX 1384
CAD (DWG)