LORO-DL FLAT ROOF DRAIN MAIN-GRAVITY FLOW 2-PART. CLAMBING FLANGE, VERTICAL WITH THERMAL INSULATION AND HEATING DN 125

LORO-DRAINLET drain in stainless steel with clamping flange, vertical, two-part, with heat insulation and heating DN 125

Описание

LORO-X DRAINLET flat roof drain, series 84(DL), two-piece, with thermal insulation and heating, vertical outlet, for main drainage with gravity flow, discharge rate 9.8 l/s at 45 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX874, made of stainless steel, DN125

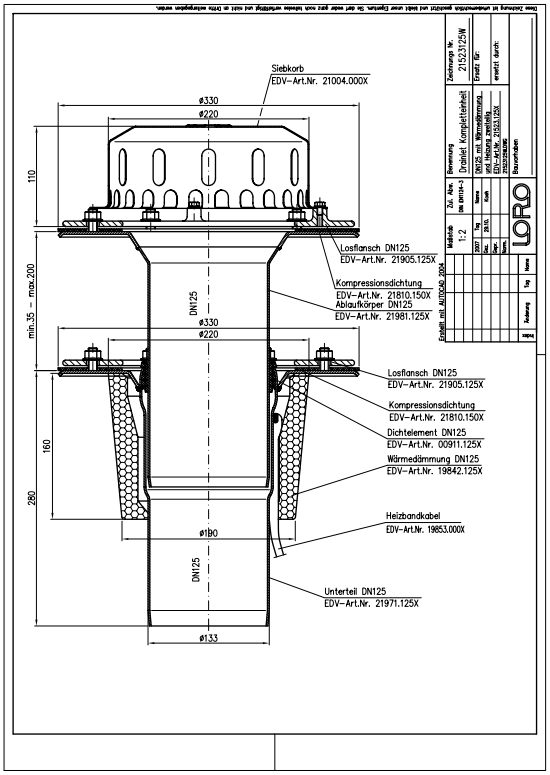

Данни за артикула

EAN код	4038088073520
ETIM клас	EC011398
Номинален диаметър	DN 125
Външни размери (ВхШхД)	330 x 330 x 432 mm
Тегло	9,80 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73072980
Материал / Цвят	Edelstahl, Silber

Забележка за употреба

Platzsparende Maße ohne „Topf“ in der Dachfläche und ein hoher Abfluss durch die leistungsstarke LORO-X Haube mit Belüftungsöffnungen zeichnen die LORO-X DRAINLET® Hauptentwässerung und Notentwässerung mit Freispiegelströmung aus. Der Klemmflansch als Los- und Festflanschkonstruktion ist für Abdichtungsbahnen (Ablauf) und Dampfsperren (2-teilig) aus Bitumen und Kunststoff gleichermaßen geeignet. Einsatzgebiete Flachdächer, Warmdächer, Kaltdächer, befahrbare Dachflächen, Umkehrdächer, Gründächer, Abdichtungsbahnen aus Bitumen und Kunststoff, Trapezblechdächer, Kastenrinnen.

Изтегляния

Alles online

[Инструкция за монтаж (PDF)](#)
[Сертификат (PDF)](#)
[CAD 2D (DXF)](#)
[CAD чертеж (PDF)](#)
[Aufbauschema (PDF)](#)
[CAD (DWG)](#)
[Брошура (PDF)](#)
[Системен технически лист LX 874](#)
[BIM Revit (RFA)](#)