LORO-DL FLAT ROOF DRAIN MAIN-GRAVITY FLOW 2-PART. CLAMBING FLANGE, SIDE, WITH THERMAL INSULATION DN 125

LORO-DRAINLET drain in stainless steel with two-part lateral clamping flange with water insulation DN 125

Descripción

LORO-X DRAINLET flat roof drain, series 84(DL), two-piece, with thermal insulation, lateral outlet 3 degrees, for main drainage with gravity flow, discharge rate 9.2 l/s at 45 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX890, made of stainless steel, DN125

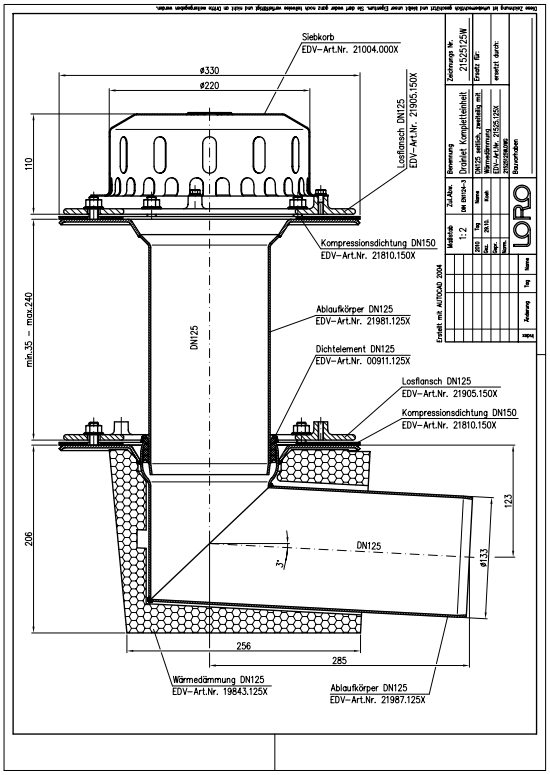

Datos del artículo

Código EAN	4038088075692
Clase ETIM	EC011398
Diámetro nominal	DN 125
Medidas exteriores (AxAxL)	330 x 453 x 364 mm
Peso	9,10 Kg (STK)
Grupo de productos	4
Número de arancel aduanero	73072980
Material / Color	Edelstahl, Silber

Nota de uso

Platzsparende Maße ohne „Topf“ in der Dachfläche und ein hoher Abfluss durch die leistungsstarke LORO-X Haube mit Belüftungsöffnungen zeichnen die LORO-X DRAINLET® Hauptentwässerung und Notentwässerung mit Freispiegelströmung aus. Der Klemmflansch als Los- und Festflanschkonstruktion ist für Abdichtungsbahnen (Ablauf) und Dampfsperren (2-teilig) aus Bitumen und Kunststoff gleichermaßen geeignet. Einsatzgebiete Flachdächer, Warmdächer, Kaltdächer, befahrbare Dachflächen, Umkehrdächer, Gründächer, Abdichtungsbahnen aus Bitumen und Kunststoff, Trapezblechdächer, Kastenrinnen.

Descargas

Alles online

[Instrucciones de instalación (PDF)]
[Dibujo dimensional (PDF)]
[Folleto (PDF)]
[Certificado (PDF)]
[Aufbauschema (PDF)]
[Ficha técnica del sistema LX 890]
[CAD 2D (DXF)]
[CAD (DWG)]
[BIM Revit (RFA)]