Fiche technique du produit

LORO_Produkt-Datenblatt_21723.050X_fr.pdf
Article 21723.050X
29.11.2026, 20:41 h


LORO-DL EMERGENCY DRAIN MAIN-GRAVITY FLOW 2-PART. CLAMBING FLANGE, VERTICAL WITH THERMAL INSULATION AND HEATING DN 50

LORO-DRAINLET Emergency Drain stainless steel clamping flange vertical two-part with heat insulation and heating DN 50

Texte de prescription

LORO-X DRAINLET flat roof drain, series 84(DL), two-piece, with thermal insulation and heating, vertical outlet, for emergency drainage with gravity flow, discharge rate 7.5 l/s at 75 mm water level on the roof, with clamping flange as loose and fixed flange construction including compression seals, for bituminous and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to LX data sheet LX1385, made of stainless steel, DN50



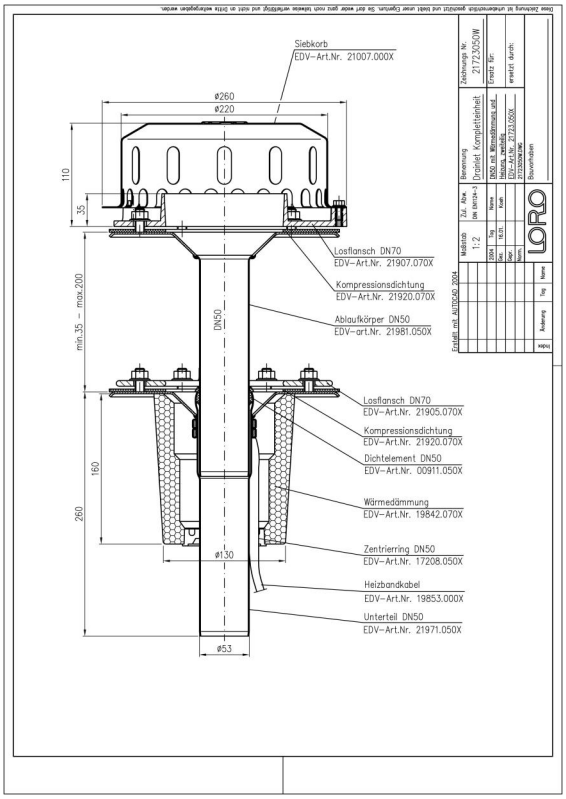

Données de l'article

Code EAN	**4038088094983**
Classe ETIM	**EC010827**
Diamètre nominal	**DN 50**
Dimensions extérieures (HxLxP)	**260 x 260 x 413 mm**
Poids	**5,00 Kg (STK)**
Groupe de produits	**4**
Numéro tarifaire douanier	**73072980**
Matériau / Couleur	**Edelstahl, Silber**

Note d'utilisation

Platzsparende Maße ohne „Topf“ in der Dachfläche und ein hoher Abfluss durch die leistungsstarke LORO-X Haube mit Belüftungsöffnungen zeichnen die LORO-X DRAINLET® Hauptentwässerung und Notentwässerung mit Freispiegelströmung aus. Klemmflansch für Bitumen und Kunststoff. Der Klemmflansch als Los- und Festflanschkonstruktion ist für Abdichtungsbahnen (Ablauf) und Dampfsperren (2-teilig) aus Bitumen und Kunststoff gleichermaßen geeignet. Einsatzgebiete: Flachdächer, Warmdächer, Kaltdächer, befahrbare Dachflächen, Umkehrdächer, Gründächer, Abdichtungsbahnen aus Bitumen und Kunststoff, Trapezblechdächer, Kastenrinnen.

Téléchargements

Alles online

Notice d'installation (PDF)
Certificat (PDF)
CAD 2D (DXF)
Dessin dimensionnel (PDF)
Fiche technique du système LX 1385
CAD (DWG)
Brochure (PDF)
Fiche technique du système LX 1834
BIM Revit (RFA)