

LORO-ROHRDURCHF.M.AUFK.EINTLG.O.WD,SENKR

LORO-pipe penetration with upstand one-piece without insulation vertical with clamping flange for bitumen DN 125

Descrição

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, without thermal insulation, DN125




Dados do artigo

Código EAN	4038088096680
Classe ETIM	EC011398
Diâmetro nominal	DN 125
Medidas exteriores (AxLxP)	400 x 270 x 350 mm
Peso	6,40 Kg (STK)
Grupo de produtos	4
Número de pauta aduaneira	73072980
Material / Cor	Edelstahl, Silber

Nota de utilização

kein Verwendungshinweis notwendig

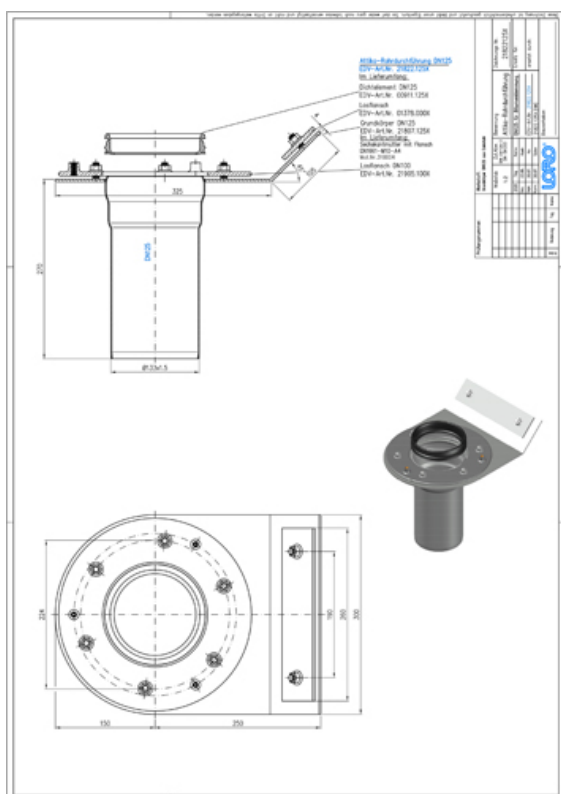

Transferências



Alles online

[Desenho cotado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochura \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)