

LORO-ROHRDURCHF.M.AUFK.EINTLG.O.WD,SENKR

LORO-pipe penetration with upstand one-piece without insulation vertical with clamping flange for bitumen DN 125

Description

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, without thermal insulation, DN125




Données de l'article

Code EAN	4038088096680
Classe ETIM	EC011398
Diamètre nominal	DN 125
Dimensions extérieures (HxLxP)	400 x 270 x 350 mm
Poids	6,40 Kg (STK)
Groupe de produits	4
Numéro tarifaire douanier	73072980
Matériau / Couleur	Edelstahl, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

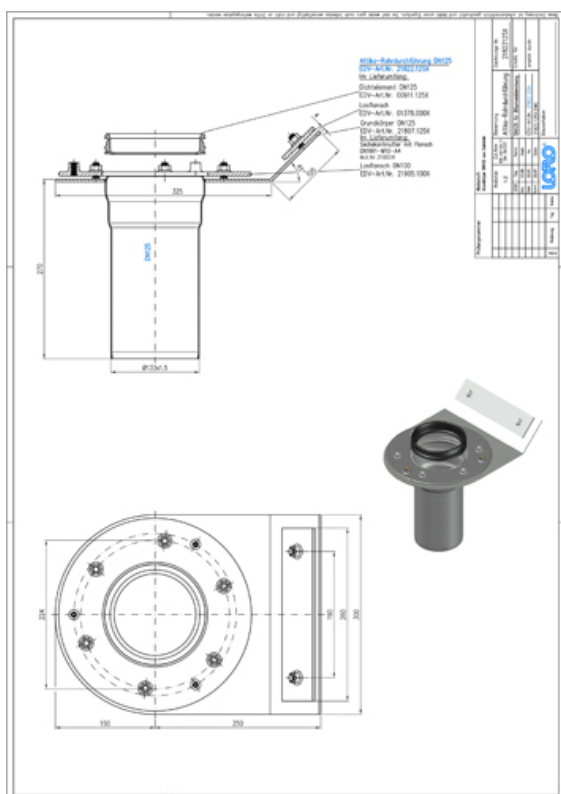

Téléchargements



Alles online

[Dessin dimensionnel \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)