

LORO-ROHRDURCHF.M.AUFK.EINTLG.MIT WÄRMED

LORO-pipe penetration with upstand, one-piece, with insulation, vertical, with clamping flange for bitumen DN 100

Beskrivning

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN100




Artikeldata

EAN-kod	4038088096710
ETIM-klass	EC010599
Nominell diameter	DN 100
Ytermått (HxBxL)	352 x 270 x 350 mm
Vikt	5,00 Kg (STK)
Produktgrupp	4
Tullnummer	73072980
Material / Färg	Edelstahl, Silber

Användningsanvisning

kein Verwendungshinweis notwendig

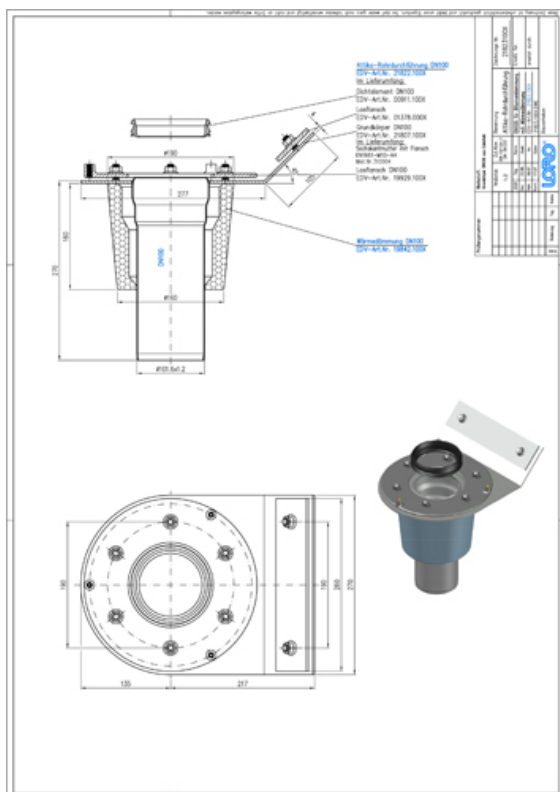

Nedladdningar



Alles online

[Måttritning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Broschyr \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)