

LORO-ROHRDURCHF.M.AUFK.EINTLG.MIT WÄRMED

LORO-pipe penetration with upstand, one-piece, with insulation, vertical, with clamping flange for bitumen DN 100

Beschrijving

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN100




Artikelgegevens

EAN-code	4038088096710
ETIM Klasse	EC010599
Nominale diameter	DN 100
Buitenafmetingen (HxBxL)	352 x 270 x 350 mm
Gewicht	5,00 Kg (STK)
Productgroep	4
Douanetariefnumme r	73072980
Materiaal / Kleur	Edelstahl, Silber

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

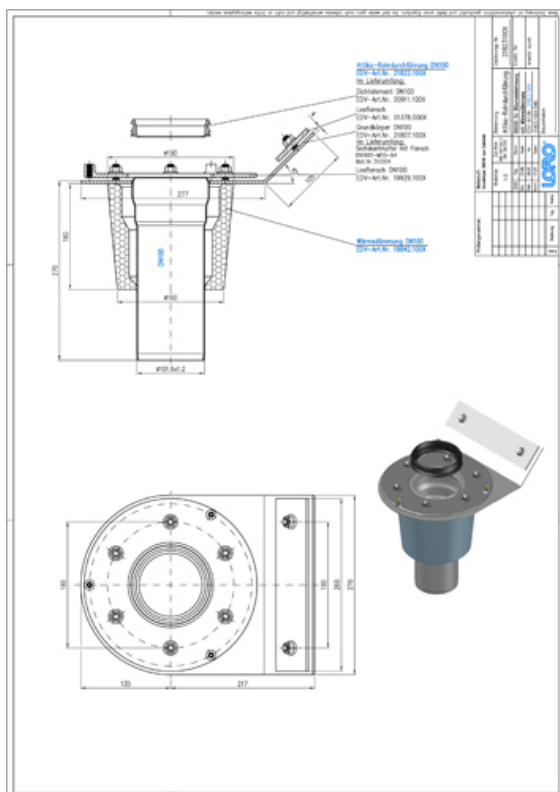

Downloads



Alles online

[Maattekening \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)