

LORO-ROHRDURCHF.M.AUFK.EINTLG.MIT WÄRMED

LORO-pipe penetration with upstand, one-piece, with insulation, vertical, with clamping flange for bitumen DN 100

Beskrivelse

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN100




Artikkeldata

EAN-kode	4038088096710
ETIM-klasse	EC010599
Nominell diameter	DN 100
Utvendige mål (HxBxL)	352 x 270 x 350 mm
Vekt	5,00 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

kein Verwendungshinweis notwendig

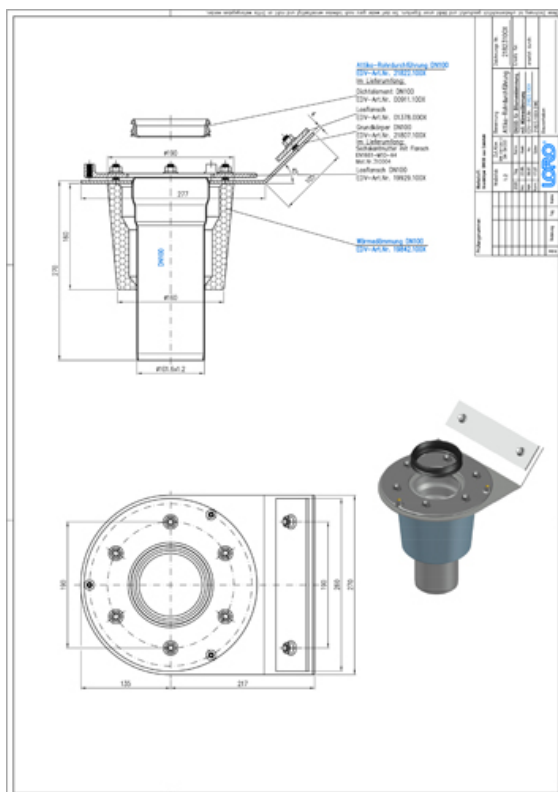

Nedlastinger



Alles online

[Måltegning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brosjyre \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)