


LORO-ROHRDURCHF.M.AUFK.EINTLG.MIT WÄRMED

LORO-pipe penetration with backslash one-piece with insulation vertical with clamping flange for bitumen DN 125

Описание

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN125

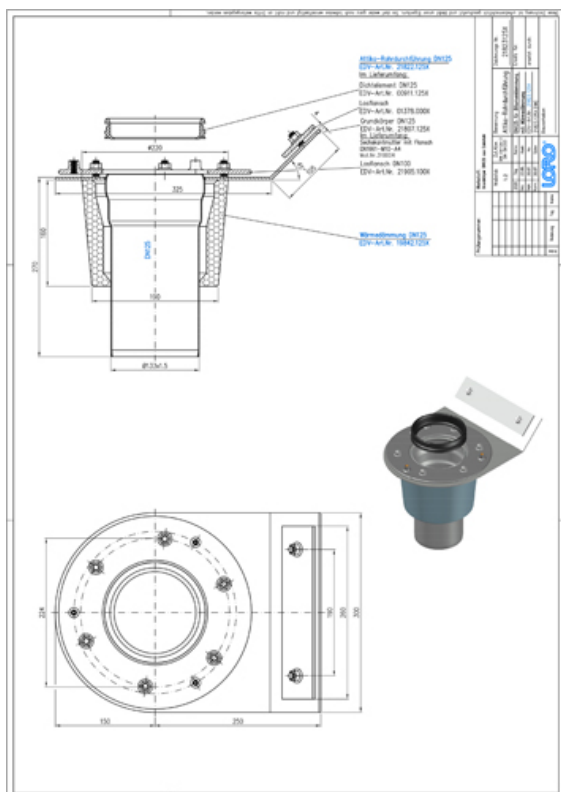

Данни за артикула

ЕАН код	4038088096727
ЕТИМ клас	EC010599
Номинален диаметър	DN 125
Външни размери (ВxШxД)	400 x 270 x 350 mm
Тегло	6,50 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73072980
Материал / Цвят	Edelstahl, Silber

Забележка за употреба

kein Verwendungshinweis notwendig

Изтегляния



Alles online

[CAD чертеж \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Брошура \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)