

## LORO-ROHRDURCHF.M.AUFK.EINTLG.MIT WÄRMED

LORO-pipe penetration with backslash one-piece with insulation vertical with clamping flange for bitumen DN 125

### Popis

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN125




### Údaje o artikli

|                           |                    |
|---------------------------|--------------------|
| EAN kód                   | 4038088096727      |
| ETIM trieda               | EC010599           |
| Menovitý priemer          | DN 125             |
| Vonkajšie rozmery (VxŠxH) | 400 x 270 x 350 mm |
| Hmotnosť                  | 6,50 Kg (STK)      |
| Skupina produktov         | 4                  |
| Colný sadzobník           | 73072980           |
| Materiál / Farba          | Edelstahl, Silber  |

### Pokyny na použitie

kein Verwendungshinweis notwendig

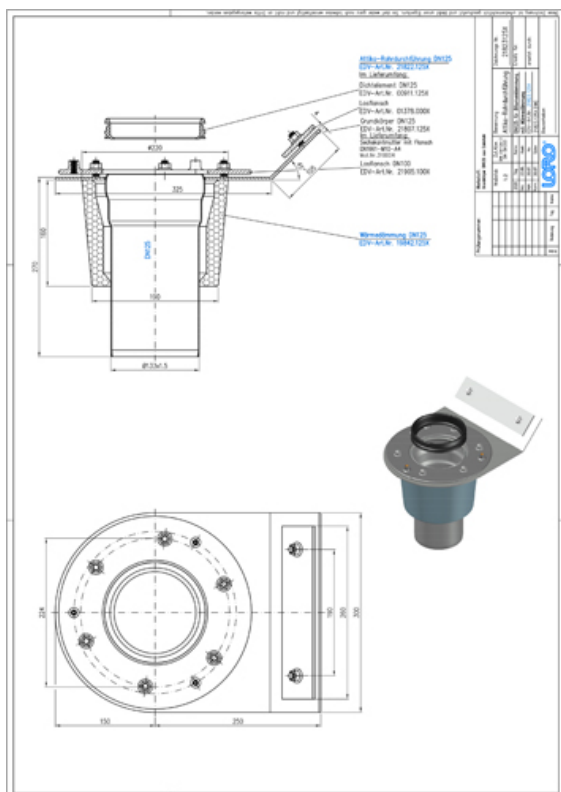

### Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)