

LORO-ROHRDURCHF.M.AUFK.EINTLT.MIT WÄRMED

LORO-pipe penetration with upstand, one-piece, with insulation, vertical, with clamping flange for bitumen DN 150

Descriere

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN150




Date articol

Cod EAN	4038088096734
Clasă ETIM	EC010599
Diametru nominal	DN 150
Dimensiuni exterioare (ÎxLxA)	415 x 330 x 350 mm
Greutate	7,50 Kg (STK)
Grupă de produse	4
Număr tarif vamal	73072980
Material / Culoare	Edelstahl, Silber

Notă de utilizare

kein Verwendungshinweis notwendig

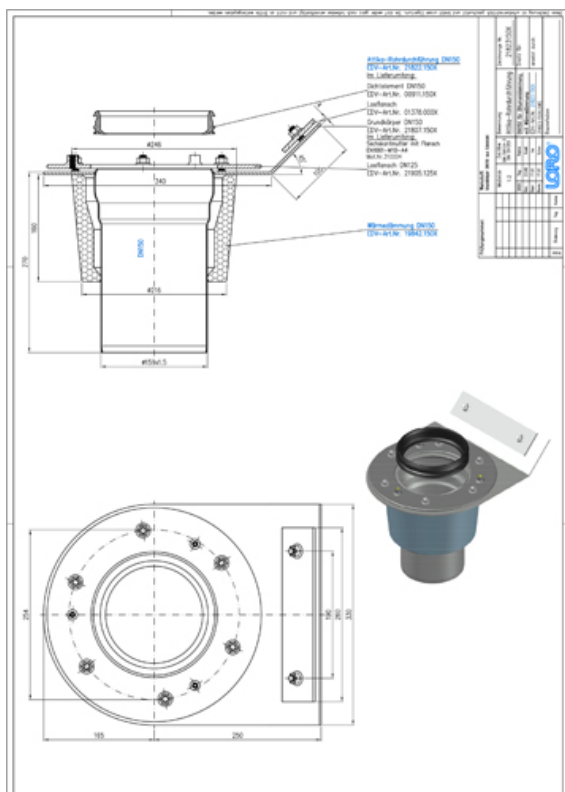

Descărcări



Alles online

[Desen CAD \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Broșură \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)