

LORO-ROHRDURCHF.M.AUFK.EINTLT.MIT WÄRMED

LORO-pipe penetration with upstand, one-piece, with insulation, vertical, with clamping flange for bitumen DN 150

Kuvaus

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN150




Tuotetiedot

EAN-koodi	4038088096734
ETIM-luokka	EC010599
Nimellishalkaisija	DN 150
Ulkomitat (KxLxS)	415 x 330 x 350 mm
Paino	7,50 Kg (STK)
Tuoteryhmä	4
Tullitariffin numero	73072980
Materiaali / Väri	Edelstahl, Silber

Käyttöohje

kein Verwendungshinweis notwendig

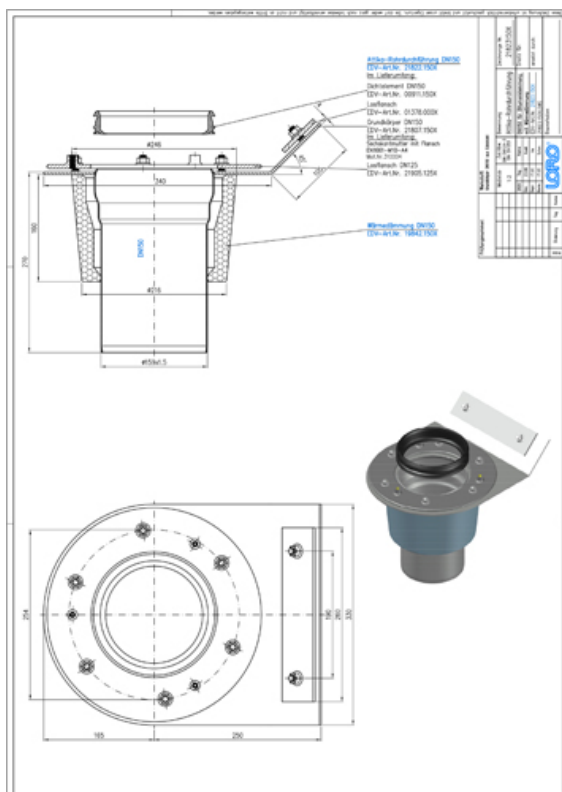

Lataukset



Alles online

[Mittapiirustus \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[Esite \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)