

LORO-ROHRDURCHF.M.AUFK.EINTLT.MIT WÄRMED

LORO-pipe penetration with upstand, one-piece, with insulation, vertical, with clamping flange for bitumen DN 150

Descripción

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel, with thermal insulation, DN150




Datos del artículo

Código EAN	4038088096734
Clase ETIM	EC010599
Diámetro nominal	DN 150
Medidas exteriores (AxAxL)	415 x 330 x 350 mm
Peso	7,50 Kg (STK)
Grupo de productos	4
Número de arancel aduanero	73072980
Material / Color	Edelstahl, Silber

Nota de uso

kein Verwendungshinweis notwendig

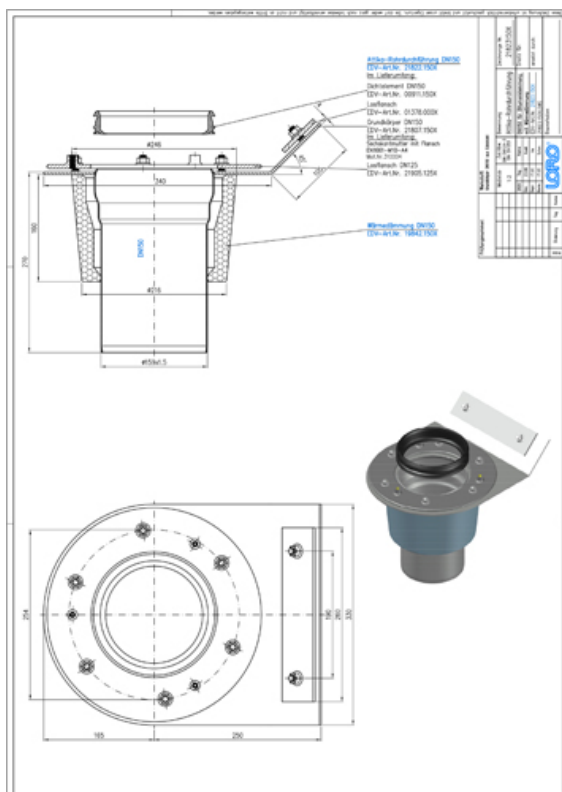

Descargas



Alles online

[Dibujo dimensional \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Folleto \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)