

LORO-ROHRDURCHF.M.AUFK.EINTLG.MIT WÄRMED

LORO-pipe penetration with backslash one-piece with heat insulation vertical with clamping flange for plastic DN 100

Popis

LORO-DRAINLET Downpipe penetration for gravity flow, with upstand, according to DIN EN 1253 with raised quality standard, with clamping flange, as loose and fixed flange construction, for plastic roofing sheets, made of stainless steel, with thermal insulation, DN100




Údaje o artikli

EAN kód	4038088096796
ETIM trieda	EC010599
Menovitý priemer	DN 100
Vonkajšie rozmery (VxŠxH)	282 x 270 x 371 mm
Hmotnosť	5,30 Kg (STK)
Skupina produktov	4
Colný sadzobník	73072980
Materiál / Farba	Edelstahl, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

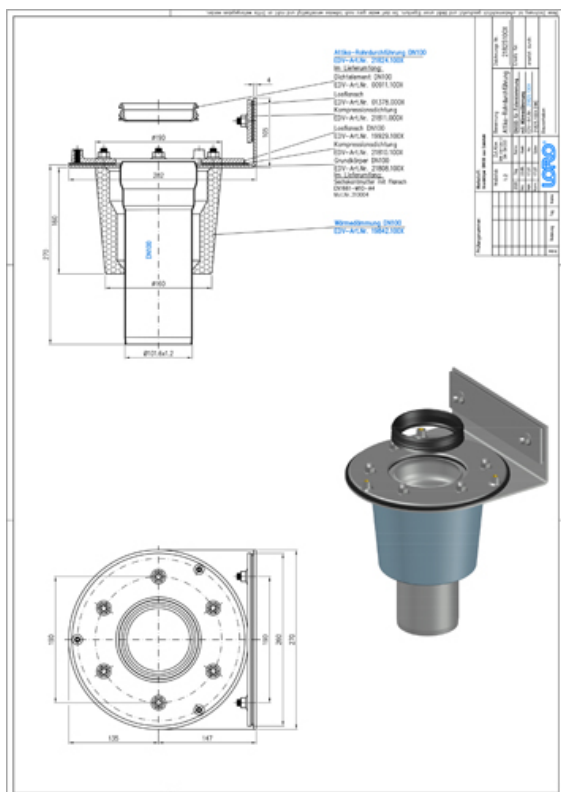

Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)