

LORO-DL GRUNDEINH.F.NOTENTW.M.KLEMMFL.

LORO-DRAINLET basic unit for emergency drainage with clamping flange vertical with insulation height 35 mm DN 50

Text pro výběrové řízení

LORO-DRAINLET flat roof drain base unit for gravity flow, according to DIN EN 1253 with raised quality standard, weir height 35 mm, with clamping flange, as loose and fixed flange construction, made of stainless steel, vertical outlet, with thermal insulation, one-piece, consisting of drain pot, loose flange with weir element, including compression seals, DN50




Údaje o artiklu

EAN kód	4038088097632
ETIM třída	EC004517
Jmenovitý průměr	DN 50
Hmotnost	2,00 Kg (STK)
Skupina produktů	4
Celní sazebník	73072980
Materiál / Barva	Edelstahl, Silber

Pokyny k použití

kein Verwendungshinweis notwendig

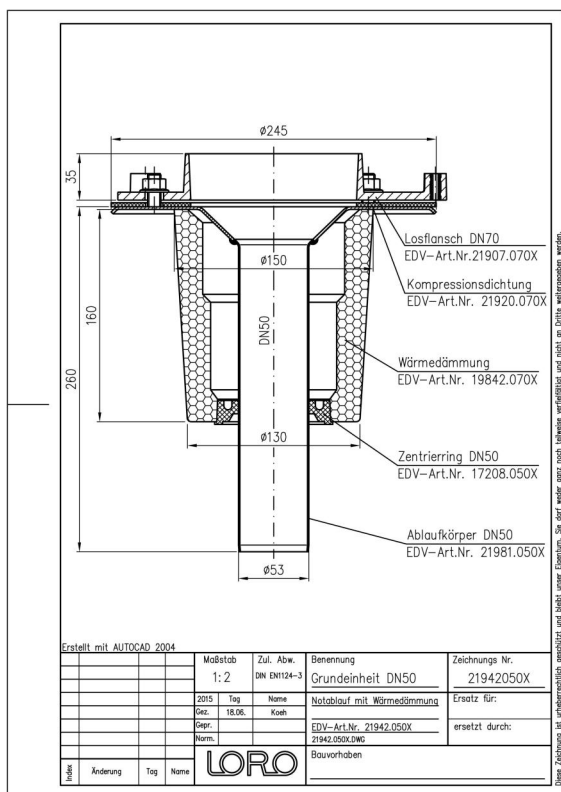

Ke stažení



Alles online

[Výkres rozměrů \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD \(DWG\)](#)