

LORO-DL GRUNDEINH.F.NOTENTW.M.KLEMMFL.

LORO-DRAINLET Basic unit for emergency drainage with clamping flange vertical with heat insulation and heating Height 35 mm DN 50

Text pre výberové konanie

LORO-DRAINLET flat roof drain base unit for gravity flow, according to DIN EN 1253 with raised quality standard, weir height 35 mm, with clamping flange, as loose and fixed flange construction, made of stainless steel, vertical outlet, with thermal insulation and heating, one-piece, consisting of drain pot, loose flange with weir element, including compression seals, DN50




Údaje o artikli

EAN kód	4038088097663
ETIM trieda	EC004517
Menovitý priemer	DN 50
Hmotnosť	2,10 Kg (STK)
Skupina produktov	4
Colný sadzobník	73072980
Materiál / Farba	Edelstahl, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

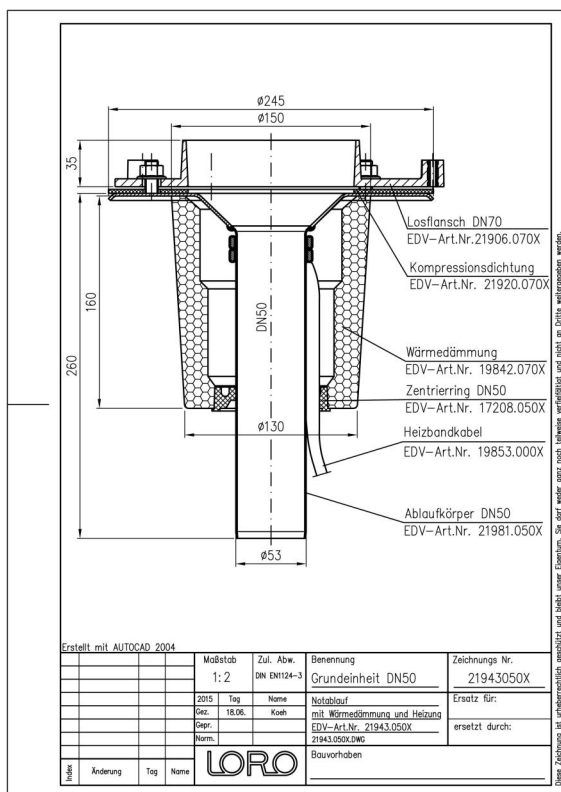

Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD \(DWG\)](#)