


LORO-DL HPT.ABL.KLEMMFL.SENKR.1-TLG.O.WD

LORO-DRAINLET main drain clamping flange vertical one-piece without insulation with retention pipe according to specification

Description

LORO-X DRAINLET flat roof drain for overload-free main drainage, please contact LOROWERK for the determination of the necessary retention openings for the main drainage and variable-height retention pipe, series 84(DL) one piece without thermal insulation, vertical pipe, for main drainage with gravity flow, discharge rate max. 4.5 l/s with a water height of up to 75 mm on the roof, with clamping flange as loose and fixed flange construction, for bitumen and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253, proof of performance according to LX-specification sheet LX1871, made of stainless steel, DN100




Article information

EAN Code	4038088100394
ETIM Class	EC011398
Nominal diameter	DN 100
Outside measurements (HxWxL)	390 x 300 x 300 mm
Weight	4,80 Kg (STK)
Product group	9
Customs tariff number	73072980
Material / Color	Edelstahl, Silber

Usage note

kein Verwendungshinweis notwendig

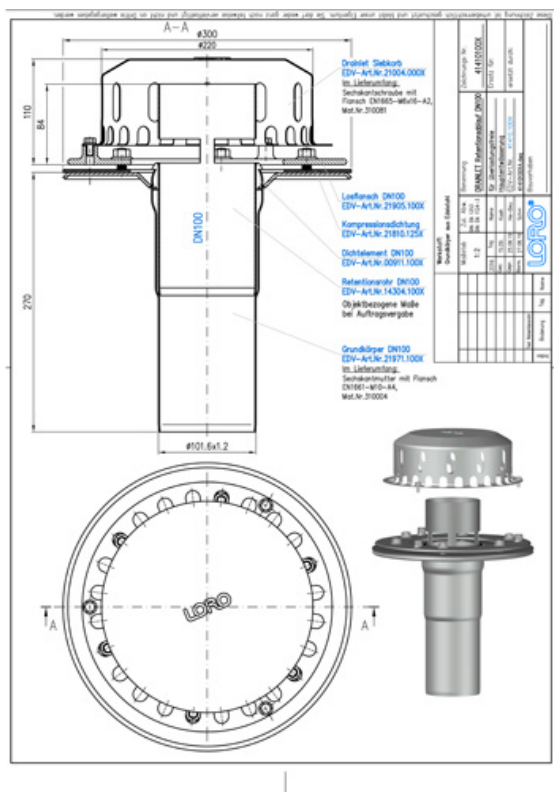

Downloads



Alles online

[CAD drawing \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

System data sheet LX 1871

BIM 3D (STEP)