


LORO-DL HPT.ABL.KLEMMFL.SENKR.1-TLG.O.WD

LORO-DRAINLET main drain clamping flange vertical one-piece without insulation with retention pipe according to specification

Opis

LORO-X DRAINLET flat roof drain for overload-free main drainage, please contact LOROWERK for the determination of the necessary retention openings for the main drainage and variable-height retention pipe, series 84(DL) one piece without thermal insulation, vertical pipe, for main drainage with gravity flow, discharge rate max. 4.5 l/s with a water height of up to 75 mm on the roof, with clamping flange as loose and fixed flange construction, for bitumen and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253, proof of performance according to LX-specification sheet LX1871, made of stainless steel, DN100




Dane artykułu

Kod EAN	4038088100394
Klasa ETIM	EC011398
Średnica nominalna	DN 100
Wymiary zewnętrzne (WxSxD)	390 x 300 x 300 mm
Waga	4,80 Kg (STK)
Grupa produktów	9
Numer taryfy celnej	73072980
Materiał / Kolor	Edelstahl, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

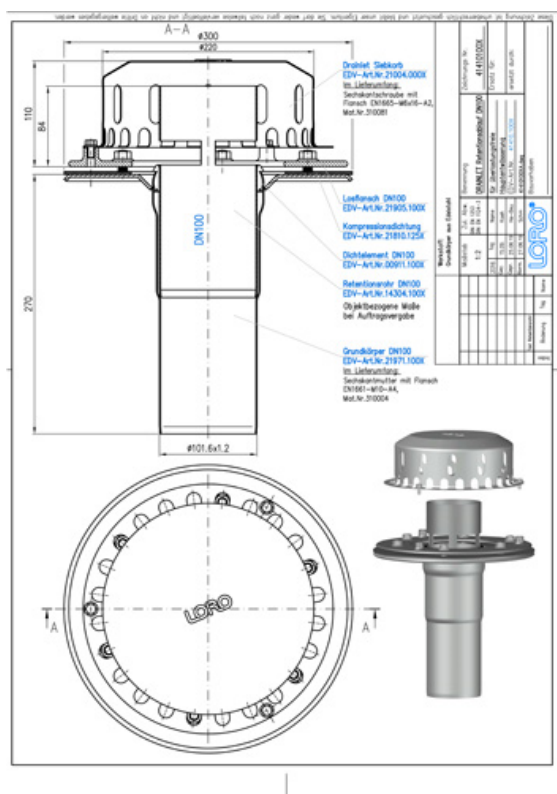

Pobieranie



Alles online

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Karta danych systemu LX 1871](#)

[BIM 3D \(STEP\)](#)