


LORO-DL HPT.ABL.KLEMMFL.SENKR.1-TLG.O.WD

LORO-DRAINLET main drain clamping flange vertical one-piece without insulation with retention pipe according to specification

Popis

LORO-X DRAINLET flat roof drain for overload-free main drainage, please contact LOROWERK for the determination of the necessary retention openings for the main drainage and variable-height retention pipe, series 84(DL) one piece without thermal insulation, vertical pipe, for main drainage with gravity flow, discharge rate max. 4.5 l/s with a water height of up to 75 mm on the roof, with clamping flange as loose and fixed flange construction, for bitumen and plastic roofing sheets, DRAINLET hood made of stainless steel, according to DIN EN 1253, proof of performance according to LX-specification sheet LX1871, made of stainless steel, DN100




Údaje o artiklu

EAN kód	4038088100394
ETIM třída	EC011398
Jmenovitý průměr	DN 100
Vnější rozměry (VxŠxD)	390 x 300 x 300 mm
Hmotnost	4,80 Kg (STK)
Skupina produktů	9
Celní sazebník	73072980
Materiál / Barva	Edelstahl, Silber

Pokyny k použití

kein Verwendungshinweis notwendig

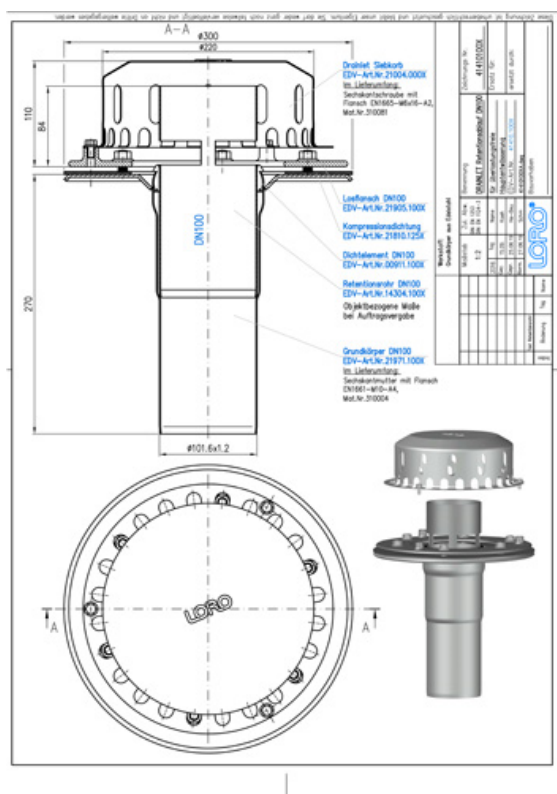

Ke stažení



Alles online

[Výkres rozměrů \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Systémový datový list LX 1871](#)

[BIM 3D \(STEP\)](#)