LX-REGENSTANDROHR O.REIN.-DECKEL DN80 M.

LORO-X standpipe without cleaning cover with 45 degree outlet DN 80

Kuvaus

LORO-X rain standpipe, made of steel, hot-dip galvanized, round, without clean-out opening with included bend 45 degrees, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 1500 mm, DN80

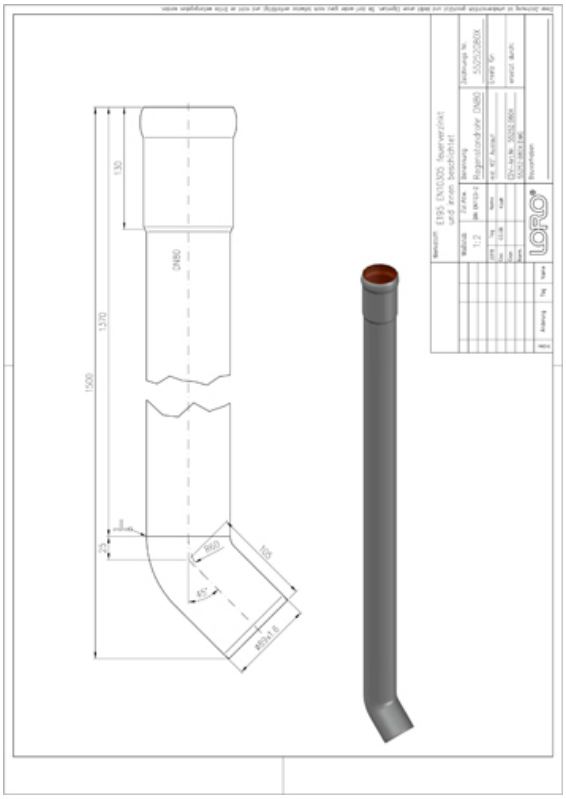

Tuotetiedot

EAN-koodi	**4038088102282**
ETIM-luokka	**EC011386**
Nimellishalkaisija	**DN 80**
Nimellispituus/-aste	**1500**
Ulkomitat (KxLxS)	**160 x 104 x 1500 mm**
Paino	**5,50 Kg (STK)**
Tuoteryhmä	**2**
Tullitariffin numero	**73063012**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

LORO-X Standrohre mit angebautem Auslaufbogen eignen sich für Fallleitungen mit Auslauf ins Freie (Downspout), ohne einen separaten Bogen an dem Fallrohr montieren und befestigen zu müssen. Bei Bedarf kann der angebaute Auslaufbogen mit weiteren LORO-X Formteilen und Rohren verlängert werden. Vorteile Keine zusätzliche Befestigung für einen Auslaufbogen. Ab DN 50 für Vordächer, Balkone, Unterstände und kleine Flächen. Bis DN 150 für große Flächen und skandinavische Bauweise. Einfache Verlängerungsmöglichkeit mit LORO-X. Individuelle Längen und Auslaufwinkel auf Anfrage möglich.

Lataukset

Alles online

Asennusohje (PDF)
CAD 2D (DXF)
Mittapiirustus (PDF)
CAD (DWG)
Esite (PDF)