

LORO-ABZWEIG QUADRATISCH, 87 GRAD, LORO-X branch square 87 degrees DN 80/80

Beskrivning

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/square, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80




Artikeldata

EAN-kod	4038088089651
ETIM-klass	EC003025
Nominell diameter	DN 80, DN 80
Nominell längd/grad	87
Yttermått (HxBxL)	186 x 88 x 265 mm
Vikt	3,30 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Falleitung.

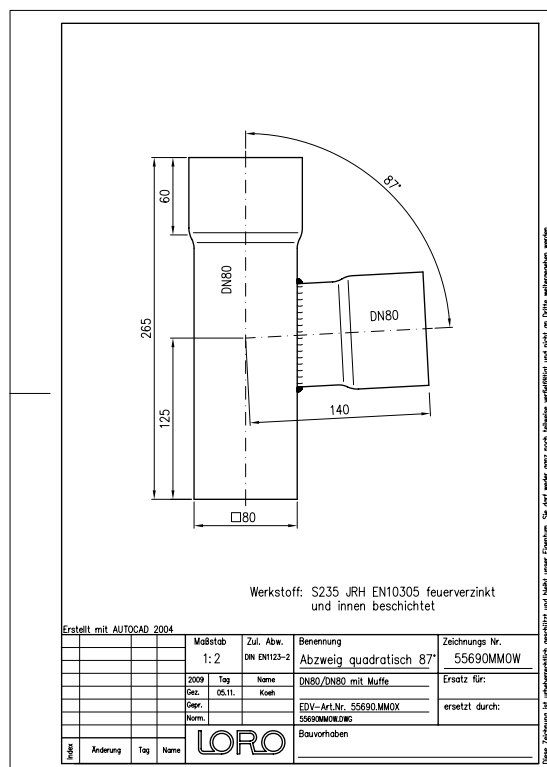

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måttitning \(PDF\)](#)
[CAD \(DWG\)](#)
[Broschyr \(PDF\)](#)
[BIM IFC4 \(parametrisk\)](#)