

LORO-ABZWEIG QUADRATISCH, 87 GRAD,

LORO-X branch square 87 degrees DN 80/80

Kuvaus

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/square, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80




Tuotetiedot

EAN-koodi	4038088089651
ETIM-luokka	EC003025
Nimellishalkaisija	DN 80, DN 80
Nimellispituus/-aste	87
Ulkomitat (KxLxS)	186 x 88 x 265 mm
Paino	3,30 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Falleitung.

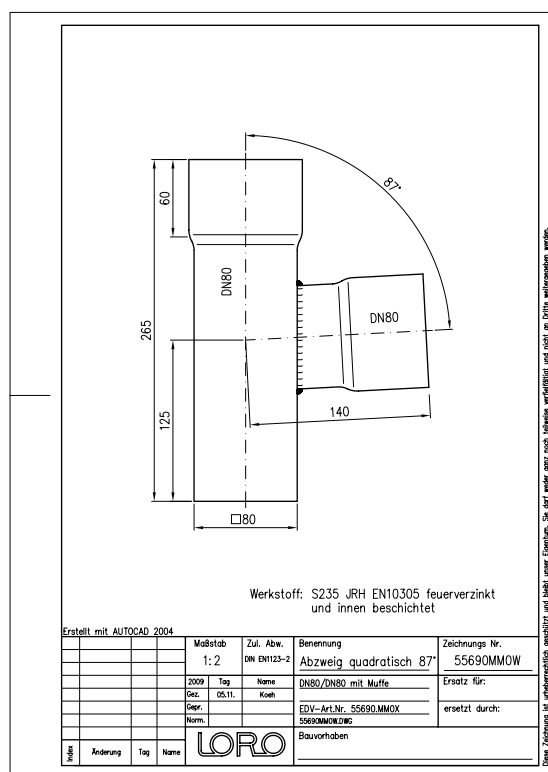

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)