

LORO-ABZWEIG QUADRATISCH 45 GRAD,

LORO-X branch square 45 degrees DN 80/80

Popis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/square, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN 80




Údaje o artikli

EAN kód	4038088089668
ETIM trieda	EC003025
Menovitý priemer	DN 80, DN 80
Menovitá dĺžka/stupeň	45
Vonkajšie rozmery (VxŠxH)	217 x 88 x 305 mm
Hmotnosť	4,30 Kg (STK)
Skupina produktov	1
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

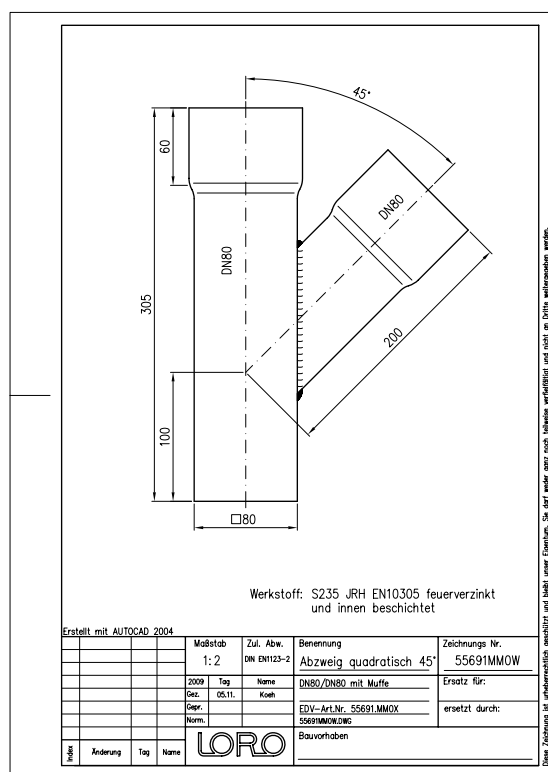

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)