

LORO-ABZWEIG QUADRATISCH 45 GRAD, LORO-X branch square 45 degrees DN 80/80

Description

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/square, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN 80




Données de l'article

Code EAN	4038088089668
Classe ETIM	EC003025
Diamètre nominal	DN 80, DN 80
Longueur/degré nominal	45
Dimensions extérieures (HxLxP)	217 x 88 x 305 mm
Poids	4,30 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

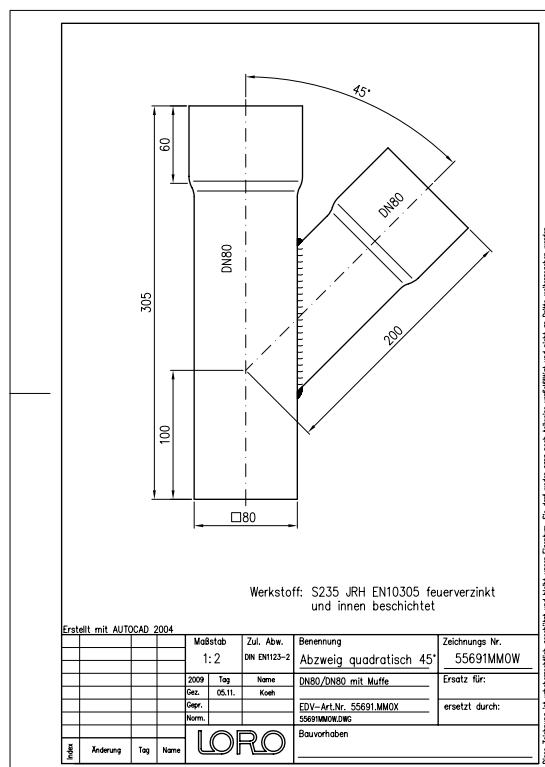

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)
[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)
[BIM IFC4 \(paramétrisch\)](#)