

LORO-ABZWEIG QUADRATISCH 45 GRAD, LORO-X branch square 45 degrees DN 80/80

Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/square, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN 80




Artikkeldata

EAN-kode	4038088089668
ETIM-klasse	EC003025
Nominell diameter	DN 80, DN 80
Nominell lengde/grad	45
Utvendige mål (HxBxL)	217 x 88 x 305 mm
Vekt	4,30 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

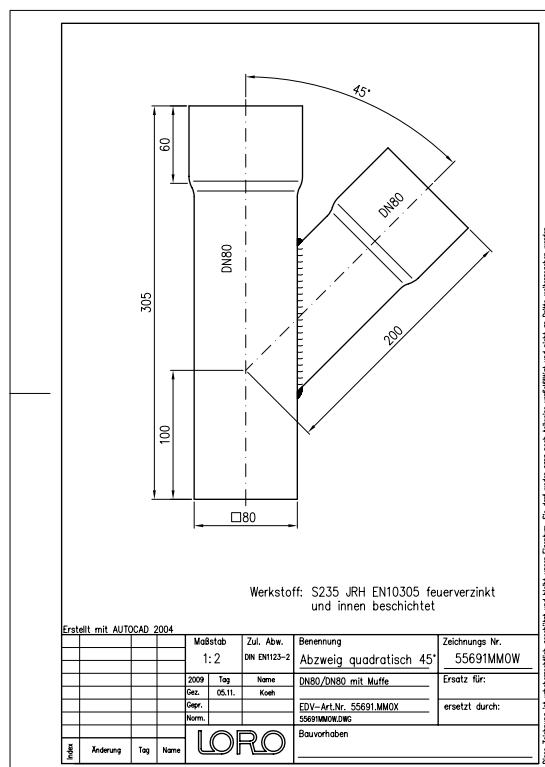

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Måltegning \(PDF\)](#)
[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)
[BIM IFC4 \(parametrisk\)](#)