

## LORO-ABZWEIG QUADRATISCH DN II=LX-MUFFE

LORO-X branch square DN II=LX socket

### Beschrijving

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70




### Artikelgegevens

|                          |                             |
|--------------------------|-----------------------------|
| EAN-code                 | 4038088024188               |
| ETIM Klasse              | EC003025                    |
| Nominale diameter        | DN 70, DN 70                |
| Nominale lengte/graad    | 87                          |
| Buitenafmetingen (HxBxL) | 76 x 155 x 220 mm           |
| Gewicht                  | 1,40 Kg (STK)               |
| Productgroep             | 1                           |
| Douanetariefnumme        | 73089098                    |
| r                        |                             |
| Materiaal / Kleur        | Stahl feuerverzinkt, Silber |

### Gebruiksaanwijzing

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

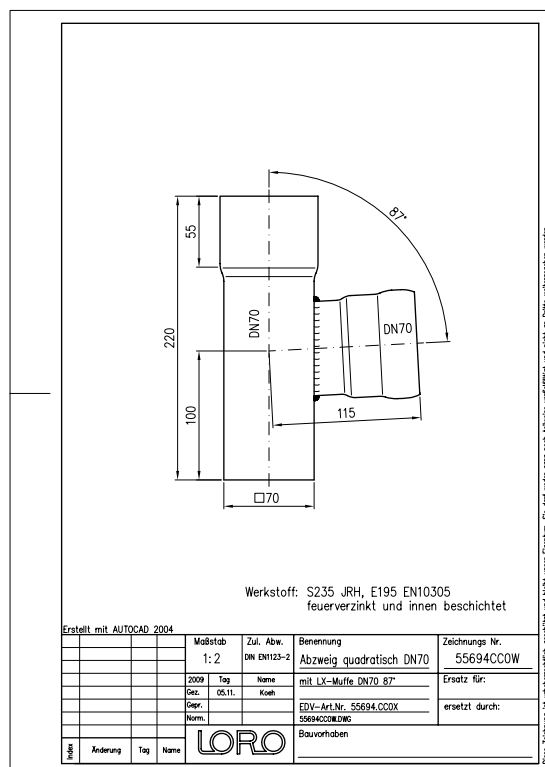

### Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Maattekening \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)