


LORO-ABZWEIG QUADRATISCH DN II=LX-MU,

LORO-X branch square DN II=LX socket round 87 degrees DN 100/100

Opis

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN100

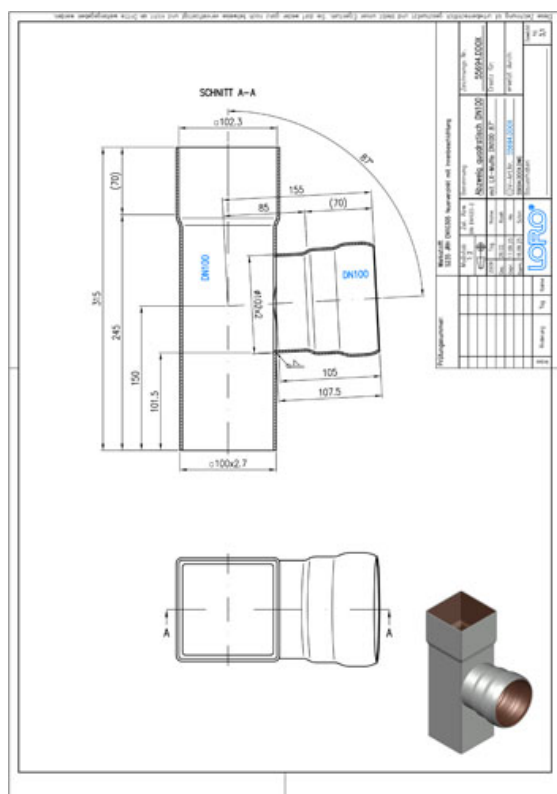

Podaci o artiklu

EAN kod	4038088024195
ETIM klasa	EC003025
Nazivni promjer	DN 100, DN 100
Nazivna duljina/stupanj	87
Vanjske mjere (VxŠxD)	118 x 212 x 315 mm
Težina	3,10 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)