


LURO-ABZWEIG QUADRATISCH DN II=LX-MU,

LORO-X branch square DN II=LX socket round 87 degrees DN 100/100

Beschrijving

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN100

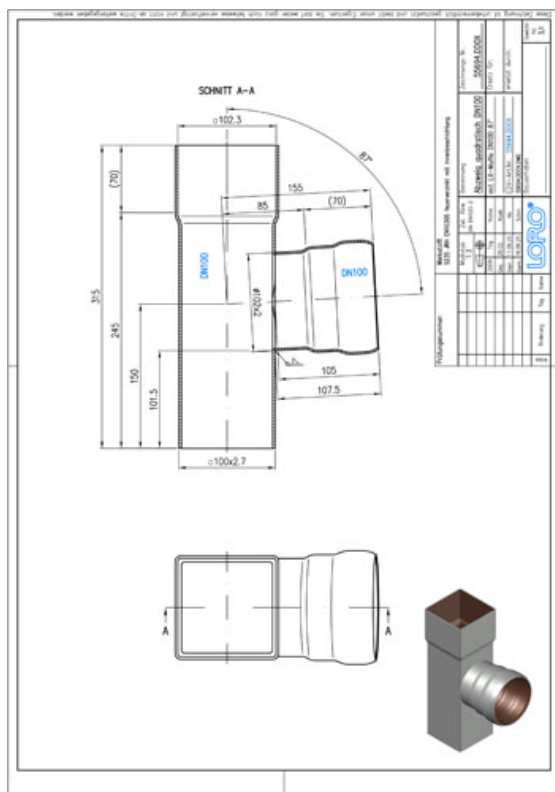

Artikelgegevens

EAN-code	4038088024195
ETIM Klasse	EC003025
Nominale diameter	DN 100, DN 100
Nominale lengte/graad	87
Buitenafmetingen (HxBxL)	118 x 212 x 315 mm
Gewicht	3,10 Kg (STK)
Productgroep	1
Douanetariefnummer	73089098
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Maattekening \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

BIM 3D (STEP)

5th of October