

LORO-ABZWEIG QUADRATISCH DN II=LX-MUFFE

LORO-X branch, square DN II=LX socket

Описание

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70




Данни за артикула

ЕАН код	4038088024201
ЕТИМ клас	EC003025
Номинален диаметър	DN 70, DN 70
Номинална дължина/градус	45
Външни размери (ВxШxД)	76 x 183 x 280 mm
Тегло	1,90 Kg (STK)
Продуктова група	1
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Röhren z.B. von Balkonen in eine quadratische LORO-X Falleitung.

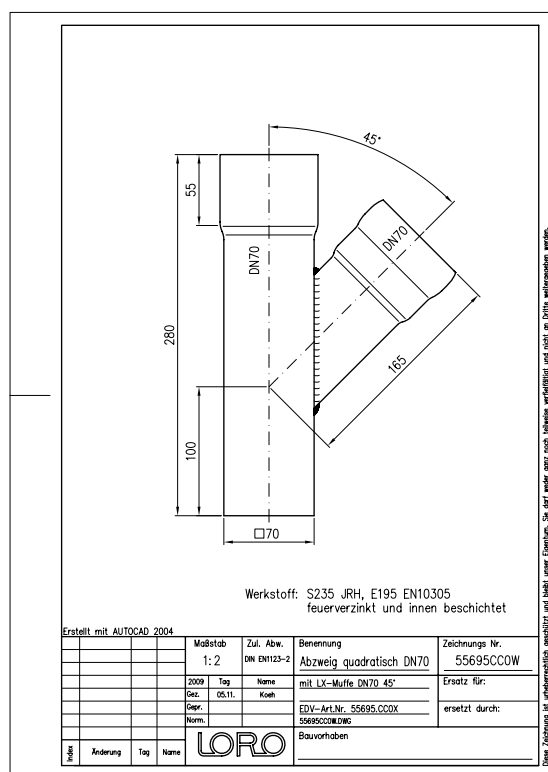

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)