

## LORO-ABZWEIG QUADRATISCH DN II=LX-MUFFE

LORO-X branch, square DN II=LX socket

### Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70




### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kode            | 4038088024201               |
| ETIM Klasse         | EC003025                    |
| Nominel diameter    | DN 70, DN 70                |
| Nominel længde/grad | 45                          |
| Ydermål (HxBxL)     | 76 x 183 x 280 mm           |
| Vægt                | 1,90 Kg (STK)               |
| Produktgruppe       | 1                           |
| Toldtarifnummer     | 73089098                    |
| Materiale / Farve   | Stahl feuerverzinkt, Silber |

### Brugsanvisning

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

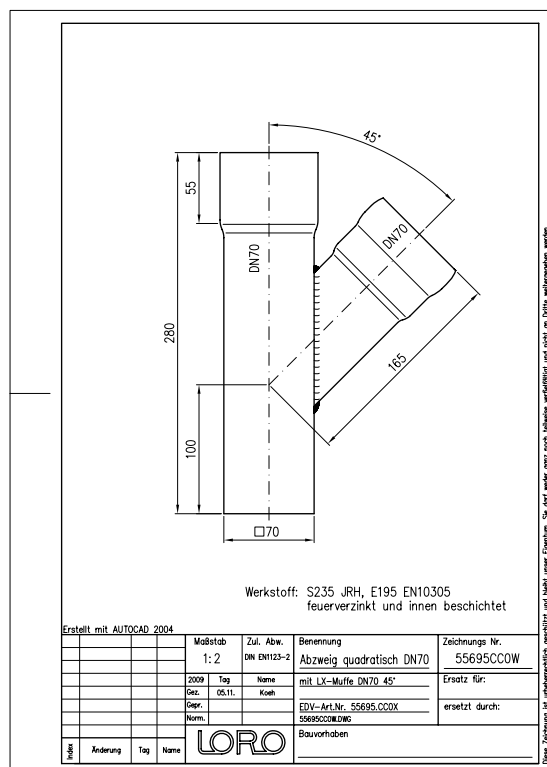

### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltægning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)