

## LORO-ABZWEIG QUADRATISCH DN II=LX-MUFFE

LORO-X branch, square DN II=LX socket

### Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70




### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088024201               |
| ETIM-klasse           | EC003025                    |
| Nominell diameter     | DN 70, DN 70                |
| Nominell lengde/grad  | 45                          |
| Utvendige mål (HxBxL) | 76 x 183 x 280 mm           |
| Vekt                  | 1,90 Kg (STK)               |
| Produktgruppe         | 1                           |
| Tolltariffnummer      | 73089098                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

### Bruksanvisning

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Röhren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

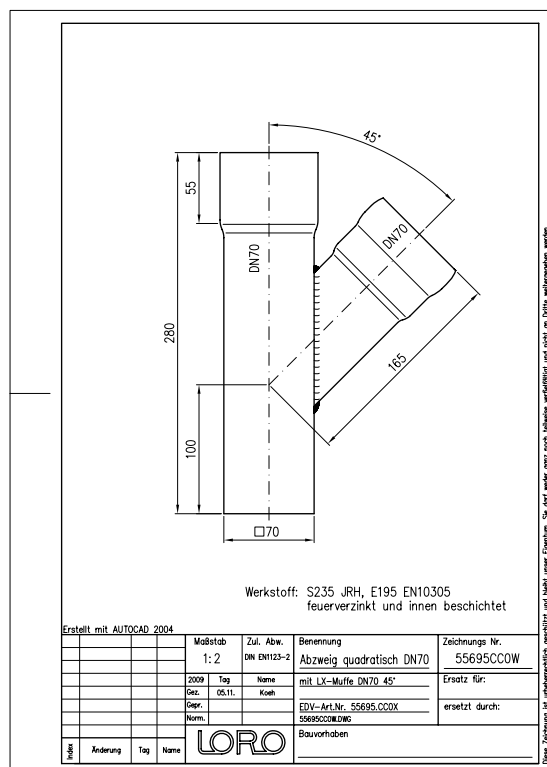

### Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltegning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)