

LORO-ABZWEIG QUADRATISCH DN II=LX-MU.

LORO-X branch square DN II=LX- socket round 45 degrees DN 100/100

Beskrivning

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100




Artikeldata

EAN-kod	4038088024218
ETIM-klass	EC003025
Nominell diameter	DN 100, DN 100
Nominell längd/grad	45
Yttermått (HxBxL)	118 x 250 x 360 mm
Vikt	4,80 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Falleitung.

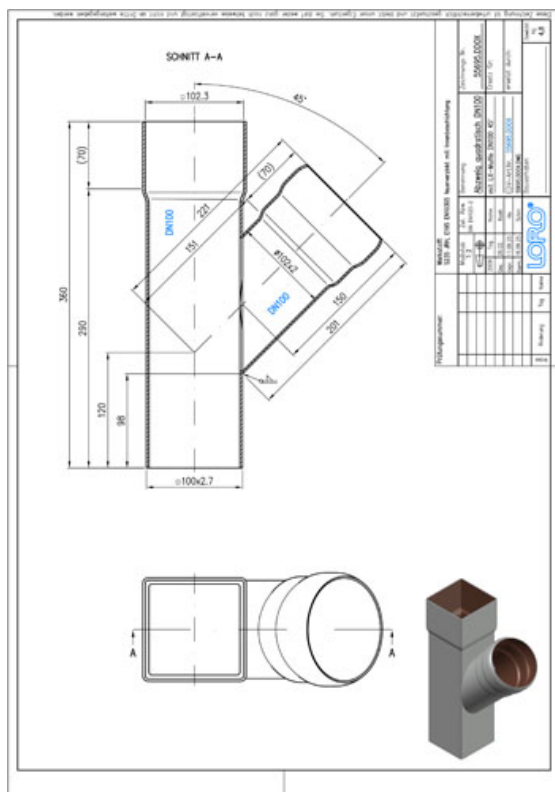

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Måttitning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Broschyr \(PDF\)](#)

[BIM 3D \(STEP\)](#)