

LORO-ABZWEIG QUADRATISCH DN II=LX-MU.

LORO-X branch square DN II=LX- socket round 45 degrees DN 100/100

Descrição

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100




Dados do artigo

Código EAN	4038088024218
Classe ETIM	EC003025
Diâmetro nominal	DN 100, DN 100
Comprimento/grau nominal	45
Medidas exteriores (AxLxP)	118 x 250 x 360 mm
Peso	4,80 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Falleitung.

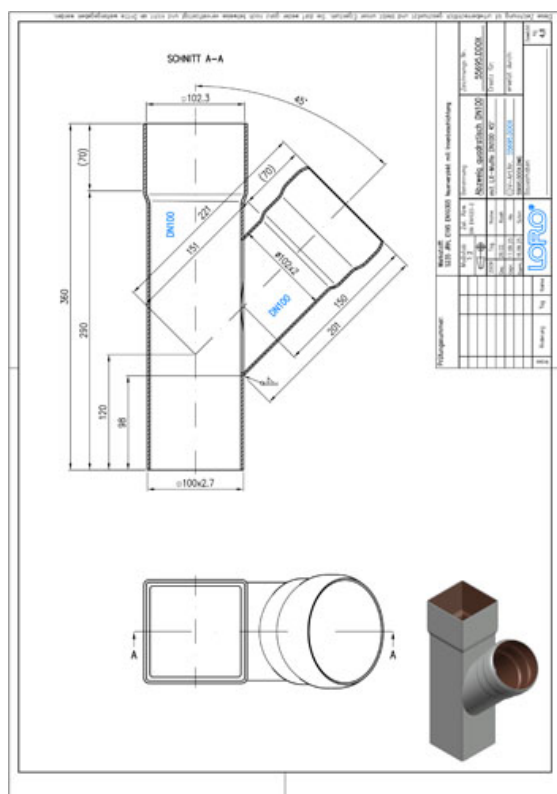

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochura \(PDF\)](#)

[BIM 3D \(STEP\)](#)