LORO-ABZWEIG QUADRATISCH DN II=LX-MU.

LORO-X branch square DN II=LX- socket round 45 degrees DN 100/100

Descrizione

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100

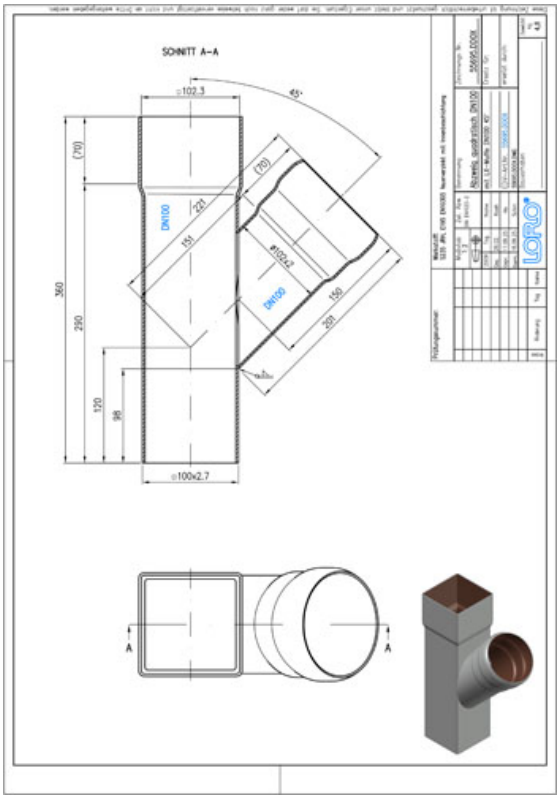

Dati articolo

Codice EAN	**4038088024218**
Classe ETIM	**EC003025**
Diametro nominale	**DN 100, DN 100**
Lunghezza/grado nominale	**45**
Misure esterne (AxLxP)	**118 x 250 x 360 mm**
Peso	**4,80 Kg (STK)**
Gruppo prodotti	**1**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

LORO-X Abzweige qudratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

Download

Alles online

Istruzioni di installazione (PDF)
Disegno dimensionale (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM IFC4 (parametrisch)
BIM 3D (IFC)