


LORO-ABZWEIG QUADRATISCH DN II=LX-MU.

LORO-X branch square DN II=LX- socket round 45 degrees DN 100/100

Description

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100

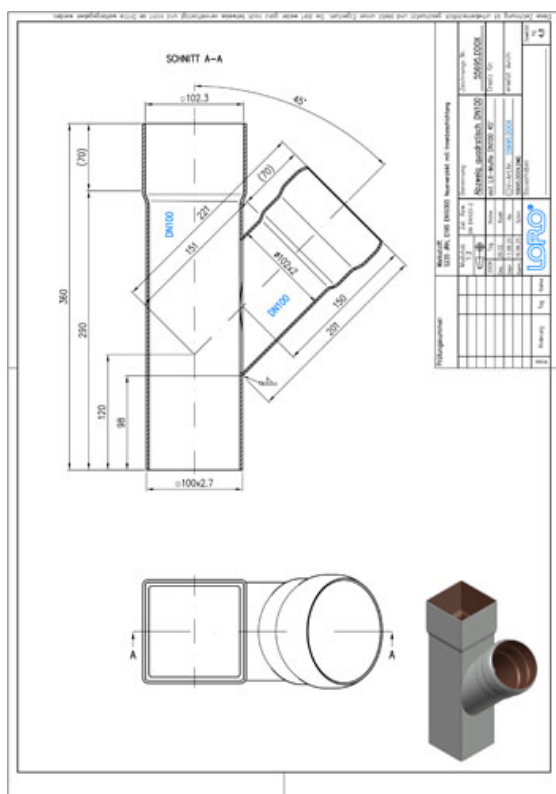

Données de l'article

Code EAN	4038088024218
Classe ETIM	EC003025
Diamètre nominal	DN 100, DN 100
Longueur/degré nominal	45
Dimensions extérieures (HxLxP)	118 x 250 x 360 mm
Poids	4,80 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Falleitung.

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)