

LORO-ABZWEIG QUADRATISCH DN II=LX-MU.

LORO-X branch square DN II=LX- socket round 45 degrees DN 100/100

Beskrivelse

LORO-X branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, square/round, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100




Artikkeldata

EAN-kode	4038088024218
ETIM-klasse	EC003025
Nominell diameter	DN 100, DN 100
Nominell lengde/grad	45
Utvendige mål (HxBxL)	118 x 250 x 360 mm
Vekt	4,80 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

LORO-X Abzweige quadratisch/rund eignen sich zum seitlichen Einleiten von runden LORO-X Rohren z.B. von Balkonen in eine quadratische LORO-X Fallleitung.

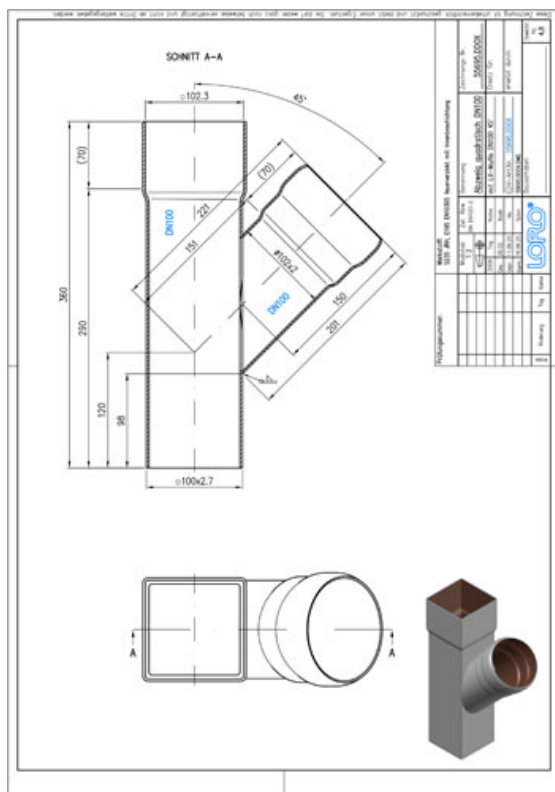

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Måltegning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brosjyre \(PDF\)](#)

[BIM 3D \(STEP\)](#)