

**LORO-X COMPOSITE PIPE WITH 1 SOCKET      3000 MM DN 80**

## LORO multilayer pipe 3000 mm DN 80

## Opis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 3000 mm long, DN 80




## Podaci o artiklu

|                         |                             |
|-------------------------|-----------------------------|
| EAN kod                 | 4038088049433               |
| ETIM klasa              | EC010225                    |
| Nazivni promjer         | DN 80                       |
| Nazivna duljina/stupanj | 3000                        |
| Vanjske mjere (VxŠxD)   | 133 x 133 x 3060 mm         |
| Težina                  | 40,00 Kg (STK)              |
| Grupa proizvoda         | 3                           |
| Carinski tarifni broj   | 73063012                    |
| Materijal / Boja        | Stahl feuerverzinkt, Silber |

## Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

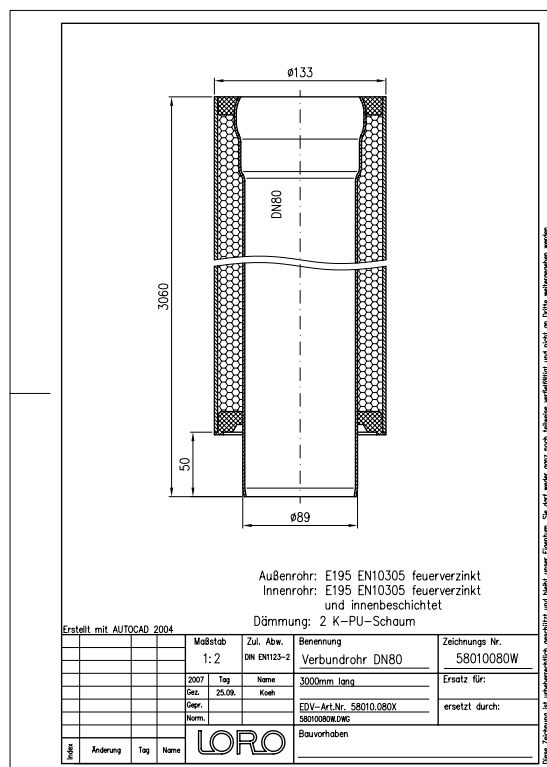

## Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

CAD 2D (DXF)

[Dimenzijski crtež \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)